



1 **A hydrological framework for persistent river pools**

2 **Sarah A. Bourke¹, Margaret Shanafield², Paul Hedley³, Sarah Chapman^{1,3}, Shawan**
3 **Dogramaci^{1,3}**

4 ¹School of Earth Sciences, University of Western Australia, Crawley WA 6009 Australia

5 ²College of Science and Engineering, Flinders University, Bedford Park, SA 5042, Australia

6 ³Rio Tinto Iron Ore, Perth, WA 6000 Australia

7 *Correspondence to:* Sarah A. Bourke (sarah.bourke@uwa.edu.au)

8 **Abstract**

9 Persistent surface water pools along non-perennial rivers represent an important water resource for
10 plants, animals, and humans. While ecological studies of these features are not uncommon, these are
11 rarely accompanied by a rigorous examination of the hydrological and hydrogeological characteristics
12 that create or support the pools. Here we **present an overarching** framework for understanding the
13 hydrology of persistent pools. We identified perched water, alluvial through flow and groundwater
14 discharge as mechanisms that control the persistence of pools along river channels. Groundwater
15 discharge is further categorized into that controlled by a geological contact or barrier (not previously
16 described in the literature), and discharge controlled by topography. Emphasis is put on clearly defining
17 through-flow pools and the different drivers of groundwater discharge, as this is lacking in the literature.
18 A suite of diagnostic tools (including geological mapping, hydraulic data and hydrochemical surveys)
19 is generally required to identify the mechanism(s) supporting persistent pools. Water fluxes to pools
20 supported by through-flow alluvial and bedrock aquifers can vary seasonally and resolving these inputs
21 is generally non-trivial. This framework allows the evaluation of the susceptibility of persistent pools
22 along river channels to changes in climate or groundwater withdrawals. Finally, we present three case
23 studies from the Hamersley Basin of north-western Australia to demonstrate how the available
24 diagnostic tools can be applied within the proposed framework.



25 **1 Introduction**

26 Permanent or almost permanent water features along non-perennial rivers (hereafter referred to as
27 “persistent pools”) represent an important water resource for plants, animals, and humans. These
28 persistent pools typically hold residual water from periodic surface flows, but also may receive input
29 from underlying aquifers, and have alternately been termed pools (Bogan and Lytle, 2011; Jaeger and
30 Olden, 2011; John, 1964), springs (Cushing and Wolf, 1984), waterholes (Arthington et al., 2005; Bunn
31 et al., 2006; Davis et al., 2002; Hamilton et al., 2005; Knighton and Nanson, 2000; Rayner et al., 2009),
32 and wetlands (Ashley et al., 2002). Non-perennial streams are globally distributed across all climate
33 types (Shanafield et al., 2021; Messenger et al., 2021). The occurrence of persistent pools along non-
34 perennial streams has been well-documented (Bonada et al., 2020), particularly in the arid southwest of
35 the U.S. (Bogan and Lytle, 2011) and across Australia (Arthington et al., 2005; Bunn et al., 2006; Davis
36 et al., 2002). Several studies have confirmed that these water features support a highly diverse
37 community of flora and fauna (Shepard, 1993; Bonada et al., 2020) and can vary significantly in water
38 quality (Stanley et al., 1997). Persistent pools are also often of cultural significance (Finn and Jackson,
39 2011; Yu, 2000), providing key connectivity across landscapes for biota (Sheldon et al., 2010; Goodrich
40 et al., 2018), and early hominid migration (Cuthbert et al., 2017). Paradoxically, the unique ecosystems
41 they support are also sensitive to changing climate and human activities (Bunn et al., 2006; Jaeger and
42 Olden, 2011). Persistent pools may dry out naturally after successive dry years (Shanafield et al., 2021)
43 and recent studies have shown that persistent pools are also changing over time in response to alterations
44 in climate and sediment transport (Pearson et al., 2020, Bishop-Taylor et al., 2017). However, their
45 hydrology is typically poorly understood, and the treatment of the hydrology of persistent river pools
46 in published literature to date has been largely descriptive, vague, or tangential to the main theme of the
47 paper (Thoms and Sheldon, 2000). As a result, effective water resource management is limited by a
48 lack of understanding of the mechanisms and water sources that support these persistent pools.

49 By far, the published literature on persistent pools focuses on the ecological processes and patterns.
50 They have received attention for the role they play as a seasonal refuge (Goodrich et al., 2018), and



51 with regards to connectivity between riparian ecosystems (Godsey and Kirchner, 2014). For example,
52 they have been shown to host unique fish assemblages (Arthington et al., 2005; Labbe and Fausch,
53 2000), macroinvertebrate communities (Bogan and Lytle, 2011), and primary productivity (Cushing
54 and Wolf, 1984). Recently, it was shown that the structure, but not composition, of these pools mirrors
55 that of perennial rivers (Kelso and Entekin, 2018). However, rarely are these ecological studies
56 accompanied by a rigorous examination of the hydrological and hydrogeological characteristics that
57 provide a setting for these ecologic communities. Although there are isolated studies that examine the
58 composition of water and propose sources within specific pools (Hamilton et al., 2005; Fellman et al.,
59 2011), more frequently they simply describe the seasonal persistence of flow and basic hydrologic
60 parameters (typically temperature and salinity, sometimes also oxygen).

61 From a geological perspective, classification of persistent pools, and springs in general, dates back to
62 the early 20th Century, when geological drivers such as faults and interfaces between bedrock and the
63 overlying alluvial sediments were first discussed in relation to springs (Bryan, 1919; Meinzer, 1927).
64 Subsequently, a diverse, modern toolbox of hydrologic and hydrogeologic field and analysis methods
65 to analyse water source, age, and composition has evolved. Yet contemporary work on springs (Alfaro
66 and Wallace, 1994; Kresic, 2010), and hydrogeology textbooks (e.g. Fetter, 2001; Poeter et al., 2020)
67 are still based primarily on these early classifications. More recent classifications, moreover, are either
68 descriptive or focus on the context (karst vs desert) or observable spring water quality (Springer and
69 Stevens, 2009; Shepard, 1993; Alfaro and Wallace, 1994) and are not readily applied to understand the
70 hydrology of persistent river pools (not all persistent pools are springs). There has also been a robust
71 body of literature developed around surface water – groundwater interaction of the past 20 years (e.g.
72 Stonedahl et al., 2010; Winter et al., 1998), some of which informs our understanding of persistent river
73 pools, but has not yet been explicitly applied in this context. Similarly, our understanding of the
74 hydrology of non-perennial streams and their links to groundwater systems continues to expand
75 (Costigan et al., 2015; Gutiérrez-Jurado et al., 2019; Blackburn et al., 2021; Bourke et al., *In review*).
76 Thus, there is both the need and opportunity for a comprehensive hydrologic framework (Costigan et



77 al. 2016; Leibowitz et al., 2018) that incorporates the relevant literature on groundwater springs and
78 surface - groundwater interaction, along with the modern suite of diagnostic tools, to provide a robust
79 framework for understanding the hydraulic mechanism that support persistent river pools.

80 Here, we establish the conceptual models and nomenclature required for a more rigorous approach to
81 the study of persistent river pools. We first classify the hydraulic mechanisms that support persistent
82 pools (Section 2) and then critique the hydrologic tools available for identifying these mechanisms
83 based on field observation (Section 3). We then discuss the susceptibility of persistent pools to shifts in
84 climate or groundwater withdrawals based on the mechanism(s) supporting them (Section 4). Finally,
85 we present three case studies from the Hamersley Basin of north-western Australia to demonstrate how
86 the available diagnostic tools can be applied within the proposed framework (Section 5). In conclusion,
87 we suggest next steps for refining and applying this framework to improve our understanding and
88 management of persistent river pools (Section 6).

89

90 **2 Hydraulic mechanisms supporting the persistence of in-stream pools**

91 Here we propose a framework for classifying the key hydraulic mechanisms that support the persistence
92 of pools along non-perennial rivers in environments where the shallow, unconfined aquifer does not
93 support year-round flow (summarized in Table 1). Geologically, we start by considering the general
94 case of a non-perennial river along an alluvial channel (inundated and/or flowing during contemporary
95 flood events) within valley-fill sediments deposited over bedrock (Sections 2.1 and 2.2).
96 We then move onto a discussion of the ways in which geological structures and outcrops can underpin
97 the persistence of river pools by facilitating the outflow of regional groundwater (Section 2.3). The
98 range of geological settings for non-perennial streams is vast (Shanafield et al., 2021); we have
99 endeavoured to provide sufficient general guidance so that the principles can be applied to specific river
100 systems as required. Hydrologically, we only consider the water balance of pools after surface flows
101 have ceased and consider any water that has infiltrated to the subsurface saturated zone (which may be
102 a perched aquifer) to be groundwater, irrespective of the residence time of that water in the subsurface.



103 Identification of the hydraulic mechanisms supporting in-stream pools is essential for effective
104 management of risks to pool ecosystems associated with groundwater withdrawals, changes to the
105 hydraulic properties of the catchment (e.g. land use change) or climate change. The water balance of
106 persistent pools may respond to a combination of more than one of these hydraulic mechanisms, and
107 the dominant mechanisms can vary spatially and temporally within pools. For example, a pool may
108 contain a mixture of water from streambed sediments and regional groundwater during certain
109 hydroperiods, but the pool wouldn't persist through the dry season in that location without groundwater
110 discharge from the regional aquifer. Thus, the maintenance of the stream ecosystem in its current state
111 would require preservation of in-stream water storage and regional groundwater inflows.

112 **2.1 Perched surface water**


113 Perched surface water can be retained in topographic lows that retain rainfall and runoff during the dry
114 season but are disconnected from the groundwater system (Fig. 1) if there is a low-permeability layer
115 between the pool and the water table (Brunner et al., 2009). The presence of this low-permeability layer
116 is essential to maintain a surface water body that is disconnected from the groundwater system. In the
117 absence of a low-permeability layer, the surface water will slowly infiltrate into the subsurface
118 (Shanafield et al., 2021). This low-permeability layer typically consists of clay, cemented sediments
119 (e.g. calcrete) or bedrock (Melly et al., 2017). The persistence of water in these pools will depend on a)
120 shading from direct sunlight or, b) sufficient water volume so that it is not completely depleted by
121 evapotranspiration during the dry season (which will be a function of pool depth).

122 The occurrence and biological significance of such perched pools has been described particularly for
123 rivers in inland Australia, where contribution of groundwater has been ruled out on the basis of pool
124 hydrochemistry (e.g. Bunn et al., 2006, Fellman et al., 2016). For example, along Cooper Creek in
125 central Australia, geochemical and isotopic studies revealed a lack of connection to groundwater, and
126 that convergence of flows at the surface and subsequent evaporative water loss-controlled water
127 volumes in many pools (Knighton and Nanson, 1994; Hamilton et al., 2005). These pools are situated



128 in depressions caused by erosion through sandy subsurface layers (note that the low-conductivity layer
129 for perching was not elucidated). It should be noted, that definitive characterization of perched surface
130 water (i.e. disconnected from the groundwater system) requires the measurement of a vertical hydraulic
131 gradient between the water level in the pool and local groundwater, as well as identification of a low-
132 permeability layer at the base of the surface water (Brunner et al. 2009). Although the ecological
133 significance of perched in-stream pools is documented within the literature (Boulton et al., 2003;
134 Arthington et al., 2005; Bonada et al, 2020), there is typically no detailed analysis of the hydrology and
135 sampling is synoptic, so the mechanism of persistence is unclear.

136

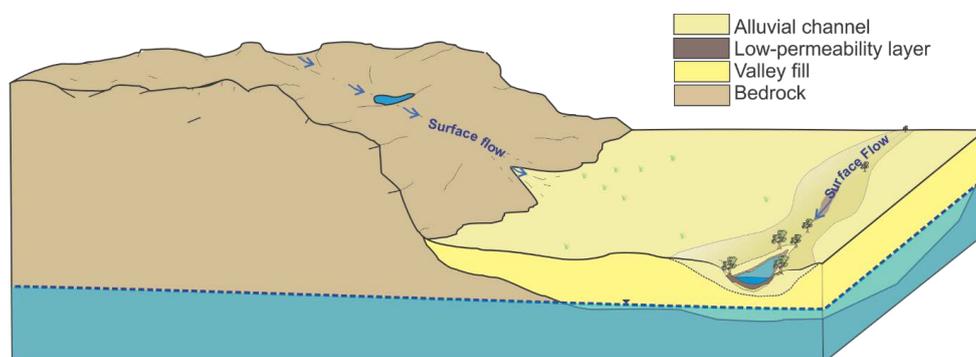

137

138 **Figure 1 Schematic illustration of perched pools where rainfall-runoff collects in a depression that has morphology**
139 **that limits evaporation and/or low permeability lithology beneath the pool that limit infiltration, allowing water to be**
140 **retained for an extended duration.**

141

142 2.2 Through-flow of alluvial groundwater

143 After a rainfall event, increases in water levels in rivers result in water storage and flow within the
144 unconsolidated alluvial sediments in the beds and banks of stream channels (Cranswick and Cook.,
145 2015). As the streamflow recedes after a flood, continuous surface flow ceases, resulting in isolated
146 pools along the river channel. Water will remain within the alluvial sediments that line the stream



147 channel beyond the period of surface flow, for a duration that will vary according to the amount of
148 water stored, the hydraulic gradient within the sediments (from the headwaters to the catchment outlet
149 and the permeability of the sediments (Stable et al., 2012; McCallum and Shanafield, 2016). This
150 alluvial water can be either perched above, or connected to, the regional unconfined aquifer depending
151 on the depth of the regional water table and the presence of a low- permeability layer to enable perching
152 (Villeneuve et al. 2015, Rhodes et al., 2017). Once within the alluvial sediments, this water can
153 subsequently 1) flow through the alluvial sediments towards the bottom of the catchment 2) be lost to
154 the atmosphere through evapotranspiration, or 3) migrate vertically downward into lower geological
155 layers (Shanafield et al., 2021). Typically, a combination of these three processes occurs, and persistent
156 surface water pools can be expressions of this water within streambed sediments (Fig. 2). Indeed, this
157 source of water, limited to the floodplain, distinguishes the through-flow mechanism from regional
158 groundwater discharge. The water level in these pools is effectively a window into the water table within
159 the streambed sediments (Townley and Trefry, 2000).


160 The subsurface water flow through these disconnected pools can be hydrologically considered as an
161 elongated, through-flow lake with inflow from the subsurface at the top of the pool and outflow to the
162 subsurface at the bottom of the pool (Townley and Trefry, 2000; Zlotnik et al., 2009). The rate of inflow
163 to (and outflow from) the pool is dependent on the hydraulic conductivity of the sediments (Käser et
164 al., 2009) and the balance of inflow and outflow controls the depth and residence time of water in the
165 pools (Cardenas and Wilson, 2007). The duration of persistence of the pool will also depend on the
166 storage capacity of the alluvial sediments that support it; these pools may dry seasonally (Rau et al.
167 2017) or persist throughout the dry season if the water level in the alluvial sediments remains above the
168 elevation of the pool. The water level and hydraulic gradients adjacent to persistent through-flow pools
169 can change seasonally in response to alluvial recharge by rainfall events and subsequent depletion of
170 water stored in the sediments. This process is analogous to “bank storage” adjacent to flowing streams
171 (e.g. Käser et al., 2009; McCallum and Shanafield, 2016).



172 There is a comprehensive body of literature on the dynamics of through-flow lakes (Pidwirny et al.,
173 2006; Zlotnik et al., 2009; Ong et al., 2010; Befus et al., 2012). The storage and movement of water
174 within alluvial sediments beneath and adjacent to streams has also been described extensively in
175 literature on hyporheic exchange (e.g. Stonedahl 2010) with water fluxes across temporal (days to
176 weeks) and spatial scales (centimetres to tens of metres). From a hydrological perspective, the key
177 feature of the hyporheic zone, and hyporheic exchange, is that it is a zone of mixing between surface
178 water and  groundwater. Based on this definition, alluvial water that is perched above, and not connected
179 to, the regional aquifer, does not fit the dominant conceptualization of hyporheic exchange. However,
180 some authors have considered alluvial flows through this hyporheic lens (Rau et al., 2017, del Vecchia
181 et al., under review) and the physical process that links streambed elevation changes to flow paths
182 beneath pool-riffle sequences can be relevant to persistent in-stream pools, regardless of connection
183 status.
184




185

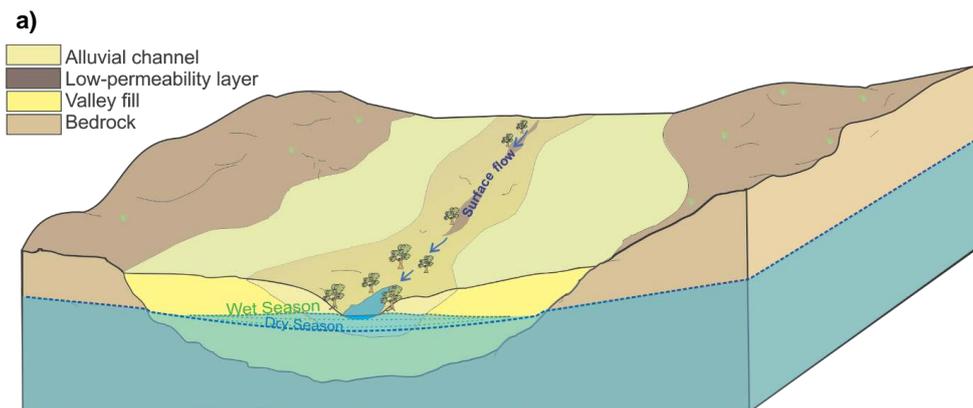

186

187

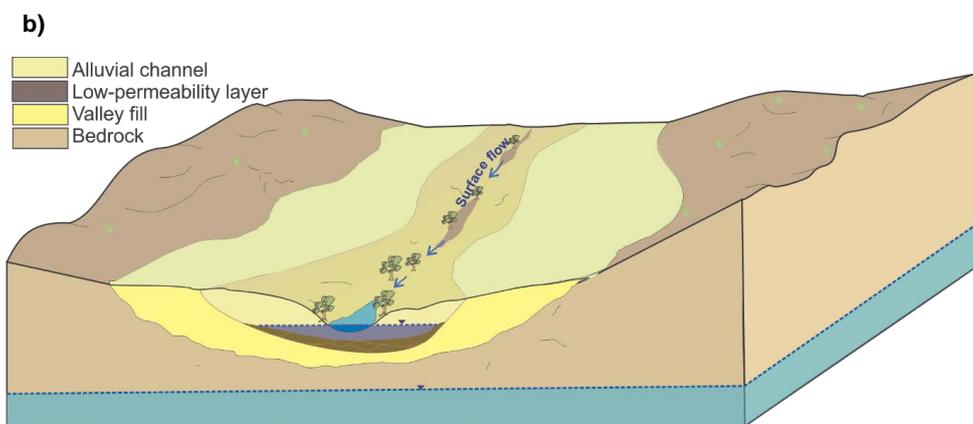

188

189 **Figure 2** Schematic illustration of pools that are maintained by through-flow from the adjacent alluvial sediments. The
190 water in these alluvial sediments can be either a) connected to the unconfined aquifer, or b) form a perched aquifer if
191 the water is stored over a low-permeability geological layer 

192

193 **2.3 Regional groundwater discharge**

194 Similar to springs, rivers can be discharge points for regional groundwater, and this discharge can
195 support the persistence of in-stream pools during periods without surface flow. Groundwater discharge
196 through springs has been articulated into a range of detailed and complex categories, which are not
197 consistent within the literature (Bryan, 1919; Springer and Stevens, 2009; Kresic and Stevanovic, 2010).



198 These existing spring classifications are based on geological mechanism, hydrochemical properties,
199 landscape setting, or a combination of all three, leading to broad categories such as thermal or artesian,
200 as well as nuanced distinctions based on detailed geological structures (Alfaro 1994). For the purposes
201 of understanding persistent river pools, this array of categories is both overly complex and incomplete
202 from a hydraulic point of view. For example, Springer (2009) presents a classification of springs based
203 on their “sphere of influence”, which is the setting into which the groundwater flows. A “limnocrene
204 spring” is simply any groundwater that discharges to a pool, as distinct from say a “cave spring”, which
205 emerges into a cave. On this basis, one might consider all persistent pools that are not perched as
206 limnocrene springs. However, the schema also articulates ‘helocrene springs’ which are associated with
207 wetlands and “rheocrene springs” that emerge into stream channels. These also seem to be potentially
208 fitting labels for persistent river pools, which does one choose? And what would it matter for water
209 resource management and the conservation of pool ecosystems if you chose one category over the other?



210 We suggest two broad categories can encompass the range of hydraulic mechanisms supporting
211 persistent pools in intermittent stream channels; geological features (i.e. lithologic contacts and barriers
212 to flow), and topographic lows. This distinction is valuable because it facilitates an understanding of
213 the source of groundwater discharge (shallow, near-water table vs deeper groundwater) and the size of
214 the reservoir supporting the pool, both of which contribute to the susceptibility of pool persistence to
215 groundwater pumping. This distinction can also be useful for identifying the dominant hydrogeological
216 control on the influx of regional groundwater to the pool; in hard-rock settings with geological contacts
217 and barriers the influx may be limited by fracture aperture  whereas in a topographic low the influx will
218 be controlled by hydraulic head gradient between the pool and the groundwater source (see Case Studies
219 below).

220 **2.3.1 Geological contacts and barriers to flow**


221 Geological contacts are well-established as potential drivers of groundwater discharge through springs
222 (Bryan, 1919; Meinzer, 1927). For example, contact springs occur where groundwater discharges over
223 a low-permeability layer, commonly associated with springs along the side of a hill or mountain (Kresic



224 and Stevanovic, 2010; Bryan, 1919). Similarly, pool persistence can be supported by groundwater
225 discharge into a stream channel over a low-permeability geological layer caused by the reduced the
226 vertical span of the aquifer (Fig. 3a); where this vertical span reduces to zero is known colloquially as
227 the aquifer “pinching out”. This mechanism has been identified as driving regional groundwater
228 discharge to streams (Gardener et al., 2011), but to our knowledge has not yet been explicitly discussed
229 in the context of persistent river pools.

230 Outflow of groundwater where a catchment is constrained by hard-rock ridges that constrict
231 groundwater flow (by reducing the lateral span of surface flow and the aquifer) can also support the
232 persistence of surface water pools (Fig. 3b). Although the importance of catchment constriction has
233 been identified by practitioners (e.g. Queensland Government, 2015), to our knowledge the discharge
234 of groundwater caused by catchment constriction as a mechanism for surface water generation has not
235 previously been described in published literature (springs or otherwise).

236

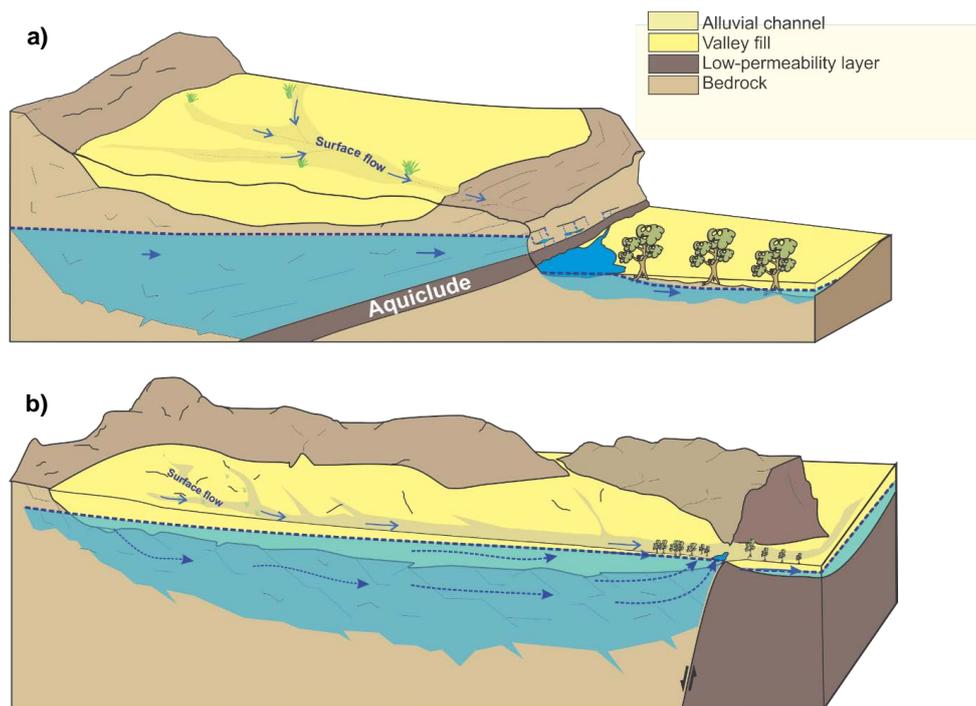

237



238 **Figure 3** Schematic illustration of a groundwater discharge pools where surface water persistence is driven by
239 geological barriers that a) cause a regional aquifer to pinch out vertically, or b) form a lateral constraint on the
240 catchment and underlying regional aquifer.

241

242 2.3.2 Topographically controlled seepage from regional aquifers


243 Pool persistence can be sustained by groundwater seepage from regional aquifers in the absence of
244 geological barriers or contacts if there is a topographic low that intersects the regional water table (Fig.
245 4). This mechanism will generally occur where differential erosion causes a difference in topography,
246 which is equivalent to depression springs (Kresic and Stevanovic, 2010; Bryan, 1919) and analogous to
247 the lakes that form in pit voids left after mining ceases (McJannet et al., 2017). For example, pools
248 likely supported by this mechanism have been identified within the Adelaide region of South Australia
249 where erosion within a syncline has exposed bedrock, facilitating groundwater discharge (Lamontagne
250 et al., 2021). Within the humid landscape of south-eastern USA, Deemy and Rasmussen (2017) also
251 describe a vast number of pools along intermittent streams. These pools, which are seasonally connected
252 by surface flows during the wet season, are expressions of the karst groundwater networks that underlie
253 them and may be considered special cases of topographically-controlled groundwater discharge pools.
254 Topographic depressions that fill seasonally with water, known as “sloughs” on the North American
255 prairie, operate similarly hydraulically (seasonal snow melt inputs, evaporation induces groundwater
256 inflow), but these sloughs are not within river channels and commonly reside within low-permeability
257 glacial clays so that they are supported by the local-scale the groundwater system (Van der Kamp and
258 Hayashi, 2009). Even some Arctic lakes, formed in shallow topographic depressions, receiving
259 groundwater input and seasonally situated within a stream of snowmelt runoff (Gibson, 2002) can be
260 considered as pools supported by topographically-controlled groundwater discharge.

261 Pools may also be sustained by topographically controlled seepage from confined aquifers if there is a
262 fault or fissure that acts as a conduit to groundwater flow (different to Fig. 3a because there is no
263 geological transition to sustain a hydraulic gradient across the pool). Topographically controlled



264 discharge from a confined aquifer is analogous to artesian mound springs like those found in the Great
265 Artesian Basin of central Australia (Ponder, 1986), but these do not reside within non-perennial streams.
266 Groundwater discharge along fractures or faults has been identified as an important mechanism for
267 groundwater discharge to the Fitzroy River in northern Australia (Harrington et al., 2013), but the
268 significance of this regional groundwater discharge to individual persistent pools is not yet known.

269

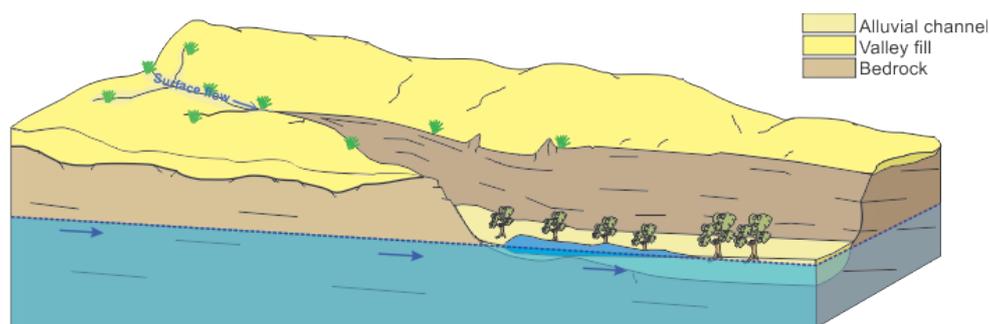

270

271 **Figure 4** Schematic illustration of a pool receiving topographically-controlled groundwater outflow from
272 an unconfined regional aquifer.

273

274 **3 Diagnostic tools for elucidating hydraulic mechanisms supporting pool** 275 **persistence**

276 Several tools in the hydrologist's toolbox are appropriate for gathering the data needed to distinguish
277 between the types of pools outlined in the previous section. For most of these, there are no examples
278 specific to persistent pools along intermittent rivers. Therefore, in this section, general background and
279 suggested considerations for use within persistent pools is given for a selection of the most common
280 methods. The information these methods provide is critical to calculate water balances and identify
281 susceptibility to groundwater withdrawals and climate change (Section 5).

282 The process of understanding pool occurrence is an iterative one. Data must be collected to infer the
283 mechanism supporting the pool (e.g. geological mapping, water levels, salinity), but also an



284 understanding of the pool mode of occurrence can be used to inform appropriate monitoring regimes.
285 For example, pools that are supported by the discharge of deep regional groundwater are potentially
286 vulnerable to groundwater abstraction, while perched pools are unlikely to be impacted. Thus, if
287 managing impacts from groundwater abstraction, then monitoring efforts would be best directed to the
288 groundwater-dependant pools at the expense of pools that are disconnected from the groundwater
289 system. It is also important to note the potential logistical constraints that can apply when installing any
290 infrastructure for sampling and monitoring in-stream pools. Persistent pools in arid landscapes are
291 commonly sites of environmental and cultural significance (Finn and Jackson, 2011; Yu, 2000) so that
292 appropriate approvals and permissions typically must be obtained prior to the installation of monitoring
293 infrastructure. This may restrict the types of data that can be collected. Moreover, some sites may be
294 sacred sites, limiting who is able to access them. Surface water features in general are a draw for
295 travellers and roaming livestock, so that any infrastructure must be secure from theft or damage. Flood
296 events and sudden, flashy streamflows are also potential threats to infrastructure, with substantial
297 sediment and vegetation (branches, trees) transported across the floodplain to heights of 2-3 m that can
298 (and have) destroyed sampling equipment. Furthermore, because regional groundwater inputs can be a
299 relatively small (but important) component of the water balance of pools, snapshot sampling commonly
300 targets the end of the dry season. This is when the contribution of regional groundwater is likely to be
301 at its greatest. However, when un-seasonal or early rainfall occurs, or if infrastructure has been
302 damaged, that endpoint in the water balance may not be captured.

303 **3.1 Landscape position and remote sensing**

304 Landscape position can provide some clues as to the mechanism controlling the persistence of a given
305 pool. For example, a pool located high in the catchment on impermeable basement rock is likely to be
306 a perched pool. A pool that is immediately prior to a ridge that constrains the catchment is likely to be
307 supported by geologically constrained groundwater discharge. Lateral catchment constriction can
308 commonly be identified from publicly available aerial imagery, but identification of vertical catchment
309 constriction will usually require geological data from drilling or regional-scale geophysical surveys.



310 The presence of geological contacts can be evident from readily available maps of surface geology, but
311 the hydraulic properties of geological contacts are not known a-priori. Geological transitions can be
312 zones of high permeability or barriers, or a combination of both (e.g. faults with high permeability in
313 the vertical, low permeability laterally) depending on the depositional and deformational history of the
314 area (Bense et al., 2013). Hydraulic head gradients can provide valuable insights, with a step-change in
315 hydraulic head a key indicator for the presence of a hydraulic barrier. The presence of active deposition
316 of geological precipitates can also be indicative of pool mode of occurrence with carbonates associated
317 with groundwater discharge and subsequent degassing of CO₂ (Mather et al., 2019). Mapping the
318 persistence of vegetation and water in the landscape based on remotely sensed data (i.e. NDVI or
319 NDWI) can be used to identify pools that persist (Haas et al., 2009; Soti et al., 2009; Alaibakhsh et al.,
320 2017), but this alone does not explain the hydraulic mechanism determining the location of the pool.
321 Combining these vegetation indices with aerial geophysics (i.e. AEM) can aid in developing a better
322 understanding of hydraulic mechanisms in remote areas, allowing the identification of low-permeability
323 layers or geological structures that are not obvious from aerial photographs (Bourke et al., *In Review*).

324

325 **3.2 Hydrography and pool water balances**

326 Direct measurement of water balances in arid and semi-arid regions can be logistically difficult
327 (Villeneuve et al., 2015). Rainfall (and therefore runoff) in arid and semi-arid environments is
328 commonly patchy and water fluxes can be either too large to measure (streamflow during a cyclone) or
329 too small to measure directly (dry-season groundwater seepage fluxes) (Shannon et al., 2002;
330 Shanafield and Cook, 2014). In the absence of data to characterize pool hydrology, regional
331 groundwater mapping can provide insights into the mechanisms supporting persistent pools, particularly
332 if the geology has also been well-characterized (see Case Studies below for examples). Water table
333 maps can articulate areas of groundwater recharge and discharge, and steep hydraulic gradients that
334 may (but not definitely) reflect the presence of geological barriers (e.g. Fitts, 2013). For the ecologist,





335 it is important to understand that regional-scale groundwater maps are always based on point-data of
336 hydraulic heads measured in the groundwater system, interpreted by a hydrogeologist in the context of
337 what is known about geology and surface drainage (Siegel, 2008). These maps can be refined based on
338 measures of groundwater salinity and groundwater residence times (from environmental tracer data),
339 both of which generally increase along a groundwater flow path. As such, these maps are limited by the
340 spatial distribution of the data available (commonly sparse) and therefore may not accurately capture
341 local-scale features and processes relevant to a particular pool of interest. Nevertheless, if an interpreted
342 water table surface suggests that the regional water table is tens of meters below ground in the vicinity
343 of a pool, then the surface water is likely (but not definitely) perched. If a pool is situated in a region
344 that has been identified as a regional groundwater discharge zone, then this groundwater discharge is
345 likely to be supporting pool persistence.

346 If instrumentation can be installed in the pool, then it may be possible to characterize the pool water
347 balance. Once a pool becomes isolated from the flowing river, and in the absence of rainfall, a general
348 pool water balance is given by;

$$349 \quad \frac{\partial V}{\partial t} = Q_i - Q_o - EA \quad (1)$$

350 where V is the volume of water in the pool (L^3), t is time (T), Q_i is the water flux from the subsurface
351 into the pool (L^3T^{-1}), Q_o is the water flux out of the pool into the subsurface (L^3T^{-1}), E is the evaporation
352 rate ($L T^{-1}$) and A is the surface area of the pool (L^2). The water level in the pool, h_p (L), can be routinely
353 measured by installing pressure transducers, but conversion of water levels to pool water volume
354 requires knowledge of pool bathymetry, and the relationship between h_p and V will change during the
355 dry season as the pool water level recedes, or if pool bathymetry is altered by scour and/or sediment
356 deposition during flood events. Evaporation rates can be taken from regional data or empirical
357 equations, but actual losses can vary depending on solar shading, wind exposure and transpiration
358 (McMahon et al., 2016). For pools with visible surface inflow or outflow, these rates can potentially be
359 measured using flow gauging (or dilution gauging), but relatively small flow rates and bifurcation of
360 flow can make this challenging.



361 Modified versions of this general water balance can be defined for particular pools, depending on the
362 hydraulic mechanism(s) supporting pool persistence (Table 1). For perched pools, which are
363 disconnected from the groundwater system, $Q_i=Q_o = 0$, so that the only component of the water balance
364 is water loss through evaporation. Pools that are supported by alluvial through-flow are hydraulically
365 connected to the water stored in the streambed alluvium. Water levels within this alluvium will be more
366 dynamic than regional groundwater levels, so that influx and efflux rates that can change over time in
367 response to rainfall events or seasonal drying (of the near-subsurface). For pools supported by
368 groundwater discharge, influx will dominate over efflux ($Q_i > Q_o$). If the groundwater discharge is
369 over an impermeable aquiclude (see Fig. 3b) there will commonly be a seepage zone up-gradient of the
370 pool so that water influx is via surface inflow, but outflow to the subsurface can form a source of
371 groundwater recharge to the adjacent (down-gradient) aquifer. If the groundwater discharge is
372 controlled by topography, then the pool will be a site of regional groundwater discharge so that local
373 groundwater recharge (and Q_o) should be negligible.

374 If a pool is connected to the groundwater system Q_i (or Q_o) can be estimated from Darcy's Law;

375

$$376 \quad Q_i = K \frac{\Delta h}{\Delta x} A_i \quad (2)$$

377 where K is hydraulic conductivity, $\frac{\Delta h}{\Delta x}$ is the hydraulic gradient between the pool and the source aquifer,
378 and A_i is the area over which the groundwater inflow occurs (which will usually be less than the total
379 area of the base of the pool). The major limitations of this approach are that K of natural sediments
380 varies by ten orders of magnitude (Fetter, 2001), and that the area of groundwater inflow needs to be
381 assumed or estimated using a secondary method. Hydraulic gradients between pools and streambed
382 sediments can be measured using monitoring wells or temporary drive points, with Δh usually on the
383 order of centimetres at most. Determination of the hydraulic gradient between regional aquifers requires
384 that the water level in the pool has been surveyed to a common datum and there is a monitoring well
385 near the pool to measure the groundwater level relative to that datum. In shallow, groundwater



386 dominated lakes, geophysical methods have also been used to determine local hydraulic gradients, and
387 therefore the direction of the water flux(es) between groundwater and surface water (Ong et al., 2010;
388 Befus et al., 2012). Blackburn et al (2021) similarly applied shallow geophysical surveys, combined
389 with mapping of hydraulic conductivities, to identify their key structures and processes controlling water
390 fluxes between groundwater systems and the streams that host persistent pools (Blackburn et al., 2021).

391 **3.3 Tracer techniques and pool mass balance**

392 Numerous studies of streams and lakes have employed hydrochemical and mass balance approaches to
393 quantify water sources (Cook, 2013; Sharma and Kansal, 2013) and groundwater recharge (Scanlon et
394 al., 2006). Some of these methods are also applicable in persistent pools, but may require modification,
395 or an iterative approach that allows for refinement of the methods as the mechanism supporting the pool
396 is elucidated. In its simplest form, snapshot measurements of pool hydrochemistry (salinity, pH, major
397 ions) can help distinguish pools that are connected to groundwater from those that are not (Williams
398 and Siebert, 1963). Dissolved ions and stable isotopes of water are relatively cheap and easy to measure
399 and have been used extensively to estimate recharge/discharge, groundwater flow, and ecohydrology in
400 arid climates (Herczeg and Leaney, 2011). However, their application to identify or quantify water
401 sources can be limited by overlapping values (Bourke et al., 2015), and spatiotemporal variability (see
402 Case Studies). Time series of electrical conductivity (EC) and stable isotopes through flood-recession
403 cycles can indicate relative rates of evaporation and through-flow (Siebers et al., 2016; Fellman et al.,
404 2011) and allow identification of the hydraulic mechanism(s) supporting pool persistence. For example,
405 if a pool is supported by regional groundwater discharge, the re-equilibrated with the groundwater EC
406 value during the dry-season (provided there isn't another streamflow event); in a perched pool, the pool
407 EC will not plateau, but continue to evapo-concentrate until the next flood event. Stable isotopic values
408 of pool water can be interpreted similarly; groundwater seepage from a regional aquifer will have a
409 relatively consistent isotopic value, while a pool isolated from the groundwater source will experience
410 isotopic enrichment through evaporation (Hamilton et al., 2005). Pools receiving alluvial throughflow
411 will have isotopic values that reflect the balance of inputs (from alluvial groundwater) and outputs



412 (evapotranspiration and outflow to alluvial groundwater). The isotopic values in the alluvial water itself
413 can also become enriched through evapotranspiration during the dry season resulting in variability over
414 time, and throughout the catchment, so that end-member values should be defined locally. In one case,
415 strontium isotopes were found to be more useful than stable isotopes of water for identifying
416 groundwater contributions to in-stream pools because the concentration in the groundwater end-
417 member was far more constrained than salinity or stable isotope values (Bestland et al., 2017).
418 Importantly, the interpretation of hydrochemical data should ideally be supported by a robust
419 understanding of the surrounding geology to ensure that the hydraulic mechanisms identified are
420 physically plausible. For example, Fellman et al. (2011) identified a number of perched pools along an
421 semi-arid zone alluvial stream channel, but in the absence of a low-permeability layer within the
422 alluvium (which was not identified) it is unclear how pool water would persist in the absence of
423 hydraulic connection to alluvial groundwater (or regional groundwater discharge).

424 Radon-222 is a commonly applied tracer in studies of surface water – groundwater interaction, and
425 ^{222}Rn mass balances have been effective for quantifying groundwater contributions to streams and lakes
426 (Cook, 2013; Cook et al., 2008). Preliminary measurements of ^{222}Rn in persistent pools indicates
427 substantial spatial variability in ^{222}Rn activity along the pools, reflecting the spatial distribution of
428 groundwater influx and gas exchange. This spatial variability will limit quantification of groundwater
429 discharge based on ^{222}Rn mass balance but can allow for hot-spots of groundwater discharge to be
430 identified (see Case Studies). Other groundwater age indicators have been measured along streams to
431 identify groundwater sources (Gardener et al., 2011; Bourke et al., 2014), but their applicability in pools
432 is yet to be determined. Given that shallow, stagnant water is common, tracers such as ^{14}C or ^3H , which
433 don't rapidly equilibrate with the atmosphere (Bourke et al., 2014; Cook and Dogramaci, 2019), are
434 likely to be better than gaseous isotopic tracers (e.g. ^4He) that equilibrate rapidly (Gardner et al., 2011).
435 If a mass balance approach is applied, then hydraulic measurements to constrain the pool water balance
436 should be made in conjunction with hydrochemical sampling to ensure that the water balance is
437 appropriately reflected in the mass balance.



438 Temperature measurements have been used extensively to identify and quantify water fluxes across
439 streambeds and lakebeds (e.g. Shanafield et al., 2010; Lautz, 2012). Diel amplitudes of subsurface
440 temperatures have been used to identify the transition from flowing stream to dry channel (with isolated
441 pools) in ephemeral systems (Rau et al., 2017). In persistent pools, temperatures at the water sediment
442 interface can be used to map zones of groundwater inflow (Conant, 2004). In arid zones, groundwater
443 temperatures will often be warmer than pool temperatures and this type of survey is best conducted at
444 dawn when the temperature gradient between pool and groundwater is at a maximum and there are no
445 confounding effects from direct solar radiation. This mapping can be conducted using point sensors or
446 thermal cameras, but in natural water bodies this method has primarily found success at thermal springs
447 where the temperature difference between surface waters and groundwater inflows is on the order of 10
448 °C (Briggs et al., 2016; Cardenas et al., 2011). Vertical profiles of temperature can also be used to
449 estimate vertical fluid fluxes but the application of this approach in pools with coarse alluvial sediments
450 (commonly through-flow pools) is likely to be limited by lateral flow within the subsurface when $K_h > K_v$
451 (Rau et al., 2010; Lautz, 2010). Analytical solutions for temperature-based flux estimates also break-
452 down at low flux rates where the difference between convection and conduction is difficult to determine
453 (Stallman, 1965). Recently developed instrumentation for measuring 3D flux fields (Banks et al., 2018)
454 shows promise, but installation in coarse alluvial sediments like those commonly found in arid
455 streambeds remains a challenge. Point-scale measurements also require up-scaling and these methods
456 may not be applicable in fractured hard-rock pools.

457 **4 Management implications: Susceptibility of persistent pools to changing** 458 **hydrological regimes**

459 Robust water resource management in semi-arid regions requires an understanding of the ways in which
460 human activities or shifting climates can alter water balances and/or the duration of pool water
461 persistence (Caldwell et al., 2020; Huang et al., 2020). In the absence of published literature quantifying
462 the susceptibility of persistent pools, we present general guidance on the susceptibility of pools to



463 changes in rainfall and groundwater withdrawals based on hydrologic principles (Table 1). Intuitively,
464 the size of the reservoir (surface catchment or groundwater storage) that supplies water to the pool
465 should be a key factor in determining the susceptibility of persistent pools to changing hydrological
466 regimes. However, the patchiness of rainfall and substantial transmission losses typical of semi-arid
467 zone intermittent river catchments (Shanafield and Cook, 2014) mean that for pools reliant on surface
468 catchments (perched or supported by alluvial through-flow), catchment size alone is unlikely to be a
469 robust predictor of resilience. As has been demonstrated for arid zone wetlands in Australia (Roshier et
470 al., 2001), pools that are storage-limited can be highly sensitive to climate variability. However,
471 increasing heavy rainfall events may not necessarily result in increased pool persistence (particularly in
472 pools closest to the location of rainfall) if subsurface storage up-gradient of the pool is already filling
473 during the wet season. In this case, subsequent rainfall will increase streamflow downstream, but not
474 result in increased subsurface storage in the reservoir supporting the pool. Moreover, recent work has
475 shown that groundwater response times are sensitive to aridity, with longer response times associated
476 with increased aridity (Cuthbert et al., 2019), so that there may be substantial time-lags between climate
477 variability and hydrologic response in pools supported by groundwater discharge.

478 We have distinguished between geological or topographic control on groundwater discharge, but this
479 distinction may not always be critical from a management perspective. In any system connected to
480 groundwater, perturbation of the dynamic equilibrium between groundwater recharge and discharge can
481 impact surface water-groundwater interactions; the timing and extent of the change will depend on the
482 magnitude and rate of alteration (Winter et al., 1998). The hydraulic head gradients (and groundwater
483 discharge rates) supporting persistent river pools may be small (Δh on the order of cms), so that small
484 decreases in groundwater level (either due to successive low-rainfall years, or groundwater
485 withdrawals) can potentially have a detrimental impact on the pool and cause the pool to dry out
486 (particularly for topographically controlled groundwater discharge to pools). For pools supported by
487 alluvial through-flow, the water balance (Table 1) is dominated by water outflow from contemporary
488 fluvial deposits but abstraction from regional groundwater could impact the pool if these two subsurface



489 reservoirs are hydraulically connected. The volume of groundwater storage in the source reservoir can
490 indicate the resilience of pools to hydrological change (i.e. a longer groundwater system response time),
491 but impacts will also depend on the distance from the recharge zone or groundwater abstraction (Cook
492 et al., 2003). The time-lag prior to a decrease in groundwater outflow to the pool, and shape of the
493 response (i.e. a slow decline or sharp decrease), will also depend on the spatial distribution of the forcing
494 (pool distance from recharge or groundwater abstraction) (Cook et al., 2003; Manga, 1999). Thus,
495 focussed groundwater abstraction close to a pool will cause a larger and faster reduction in groundwater
496 outflow than diffuse abstraction across the aquifer, or abstraction further away (Cook et al., 2003; Theis,
497 1940). For example, groundwater pumped from within 1 km of a pool will result in a rapid decrease in
498 discharge (months to years) but the same volume of abstraction distributed throughout the catchment
499 will result in a more gradual decline in groundwater discharge to the pool (years to decades).
500 Susceptibility can be further modified by geological barriers, which may not be obvious from the
501 surface topography or regional geological maps (Bense et al., 2013), but can isolate pools from the
502 regional groundwater system and either i) increase susceptibility to pumping within the connected
503 aquifer, or ii) reduce susceptibility if the pumping is on the other side of the barrier (Marshall et al.
504 2019).
505
506



507 **Table 1 Summary of hydrological framework for persistent pool**

Mechanism supporting pool persistence and water balance*	Physical characteristics	Hydrochemical characteristics	Susceptibility to stressors
Perched water $\frac{\partial V}{\partial t} = EA$	Topographic low that catches rainfall/runoff. Present in i) elevated hard-rock headwaters of catchments and ii) regionally low-lying topographic location. Water levels in aquifer lower than pool water levels. Vertical head gradient between pool and aquifer with unsaturated zone below pool.	Highly variable; hydrochemistry is a function of rainfall and subsequent evaporation. Substantial enrichment of solutes and water isotopes during dry season. Precipitated salts usually wash away in next flood, (or do not form because of low solute concentrations in streamflow source)	Relies on surface flows and overland runoff, which is directly tied to precipitation. Sensitive to climate but largely independent of groundwater use. Where infiltration capacity is high pools in downstream areas are more vulnerable to reduced rainfall.
Alluvium through-flow $\frac{\partial V}{\partial t} = Q_i - Q_o - EA$	Expression of river alluvium water table and through-flow. Head gradient reflects water table in alluvium. Water levels in pool coincident with water level in adjacent alluvium (cm-scale gradients expected at influent or effluent zones). Bank storage is important for pool water balance. Absence of surface geological features (e.g. hard-rock ridges) or waterfalls. Physical location may migrate as flood-scour re-shapes alluvium bedform.	Hydrochemically similar to alluvial water; enrichment of solutes and water isotopes during dry season limited by through-flow. Flood water flushes through the alluvium and replaces or mixes with any residual stored water (i.e. hydrochemically flood and alluvial groundwater are the same after a flood). More through-flow means shorter pool residence time and less enrichment.	Relatively small changes in rainfall or groundwater level can result in pool drying if the water level in the unconfined (alluvial) aquifer is reduced to below the base of the pool. Impact of withdrawals from alluvium depends on volume and proximity to pool. Abstraction from regional aquifers that are hydraulically connected to alluvium may also affect pool water levels by inducing downward leakage from alluvium.
Groundwater discharge			
1) Geological contacts and barriers to flow $\frac{\partial V}{\partial t} = Q_i - Q_o - EA$	Two sub-types: i) Catchment constriction across ridges, or ii) aquifer thinning due to geological barrier intersecting topography. Presence of waterfalls or surface geological features (hard-rock ridges). Hydraulic head step-changes across pool feature. Carbonate deposits if source aquifer has sufficient alkalinity.	Consistent hydrochemical composition at point of contact/barrier. Evapo-concentration and evaporative enrichment down-gradient of discharge point. Initial pulse of water from runoff may be saline, pool salinity equilibrates with groundwater at low water levels.	Susceptibility to groundwater abstraction depends on scale of source groundwater reservoir (if large then potentially more resilient) and location of groundwater abstraction. Water persistence is less susceptible to changes in rainfall than other pool types. Presence of geological barrier between pool and groundwater abstraction may limit impacts.
2) Topographically controlled seepage from regional aquifer $\frac{\partial V}{\partial t} = Q_i - EA$	Topography intersects i) water table or ii) preferential flow from artesian aquifer. Standing water persists during dry season due to groundwater discharge in absence of rainfall. Negligible recharge to aquifer during flood event (pool is regional discharge zone). Carbonate deposits if source aquifer has sufficient alkalinity.	Consistent hydrochemical composition at point of seepage. Initial pulse of water from runoff may be saline, pool salinity equilibrates with groundwater at low water levels	Susceptibility to groundwater abstraction depends on scale of source groundwater reservoir (if large then potentially more resilient) and location of groundwater abstraction. Hydraulic gradient supporting pools may be similar to pool depth. No geological barrier to limit susceptibility.

508 *Water balance of residual pool when disconnected from surface water flows and only the one mechanism is operating



509 **5 Application of this framework to persistent pools in the Hamersley Basin**

510 In this section we demonstrate the application of this framework to persistent river pools in north-west
511 Australia. We begin by providing an overview of our understanding of the hydrology of persistent river-
512 pools in the Hamersley Basin region. We then present three case studies to demonstrate how some of
513 the tools described in Section 3 can be applied to identify the key hydraulic mechanisms supporting
514 pool persistence, and the implications for pool susceptibility.

515 **5.1 Overview of persistent pools in the Hamersley Basin**

516 The Hamersley Basin has an arid-tropical climate with a wet season from October to April and a dry
517 season from May to September (Sturman and Tapper, 1996). Average annual rainfall is less than 300
518 mm yr⁻¹ with most rain falling between December and April (www.bom.gov.au). Annual rainfall
519 statistics can vary dramatically, depending on the influence of thunderstorms and cyclone activity.
520 Thunderstorm activity is commonly highly localised, limiting the potential for spatial interpolation of
521 data from individual monitoring sites. Annual evaporation is around 3000 mm yr⁻¹ (www.bom.gov.au),
522 or about ten times annual rainfall, so that permanent surface water is rare. Ranges, spurs, and hills are
523 separated by broad alluvial valleys with numerous deep gorges created by differential erosion. During
524 large flood events, runoff creates sheet flow along the main channel and the extensive floodplain can
525 remain flooded for several weeks. In the absence of cyclonic rainfall, surface water is generally limited
526 to a series of disconnected pools along the main channels. The valleys are filled with up to 100 m of
527 consolidated and unconsolidated Tertiary detrital material consisting of clays, gravels, and chemical
528 precipitates. The Quaternary alluvial sediments along the creek-lines and incised channels (incised on
529 the order of metres) consist of coarse, poorly sorted gravel and cobbles (thickness of up to tens of
530 metres, widths of up to hundreds of metres). Fresh groundwater is abundant throughout the region, both
531 within the Archaean basement rocks, where permeability is increased via weathering, fracturing or
532 mineralisation, and within the Tertiary and Quaternary sediments (Dogramaci et al., 2012).



533 Numerous persistent water features have been identified along drainage lines that span the range of
534 hydrogeological mechanisms in the framework outlined in Section 2 (Fig. 5). A sub-set of these (22
535 pools) have been investigated in more detail (Fig. 6) to characterize their mode of occurrence
536 (Dogramaci, 2016). Based on data from this subset of pools, we have generalized the distribution of the
537 hydrogeologic mechanisms supporting pool persistence across this landscape (Fig. 7). Perched pools
538 are generally found in elevated, hard-rock areas where erosion has created a deep pool that is shaded to
539 minimise evaporation. For example, there are approximately 70 pools that reside within the ephemeral
540 drainage lines of the Western Range that flow for a few days in response to rainfall; a subset of pools
541 that are deeply incised and shaded persist all year round (those that are shallower and more exposed to
542 sunlight dry out faster and are not perennial). These pools are important ecologically (supporting bird
543 populations) and culturally (supporting traditional hunting practices). Because these pools are not
544 connected to groundwater, they are not directly at risk of depletion by groundwater withdrawals.
545 However, they are susceptible to changes in streamflow that reduce the water storage in the pools at the
546 commencement of the dry-season, either due to reduced inflows or in-filling by sedimentation.


547 Persistent pools that are connected to groundwater are also abundant across the Basin with the folded
548 and tilted layered sedimentary sequence resulting in numerous exposures of geological contacts at the
549 land surface. Groundwater discharge from the unconfined aquifer through contact springs is therefore
550 a common mechanism supporting persistent river pools in this region. These are particularly prevalent
551 at the intersection of fluvial deposits and erosion-resistant, low permeability basement rocks.
552 Groundwater-fed pools are also present due to catchment constraints where erosion-resistant layers
553 form ridges in the landscape. Pools supported in part (or completely) by alluvial through-flow are also
554 common along the stream channels due to the storage capacity of the coarse alluvial sediments. The
555 hydraulic resistance caused by a catchment constraint can further enhance the persistence of alluvial
556 water storage up-stream of the constraint, resulting in numerous persistent pools supported by alluvial
557 throughflow. Although these pools are supported by groundwater, the hydraulic gradients maintaining



558 groundwater inflow to the pool are commonly on the order of tens of centimetres, so that relatively
559 small changes in the water balance can result in the pool drying out (e.g. successive low-rainfall years).
560



561
562 **Figure 5** Photos of persistent pools within the Hamersley Basin, spanning the range of hydrogeological mechanisms
563 within the proposed framework.

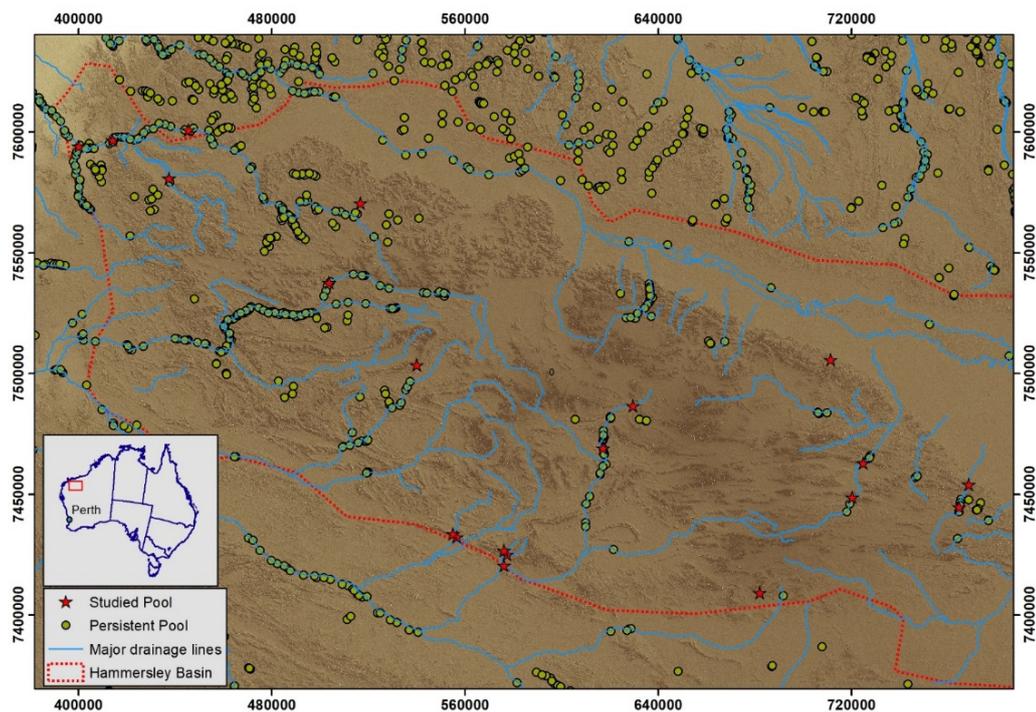

564


565 **Figure 6** Prevalence of persistent pools on watercourses in the Hamersley Basin (“Waterholes” features
566 from Geodata Topo 250K Series 3 data set, <http://pid.geoscience.gov.au/dataset/ga/63999>) and select pools
567 examined in deta 

568

569

570

571

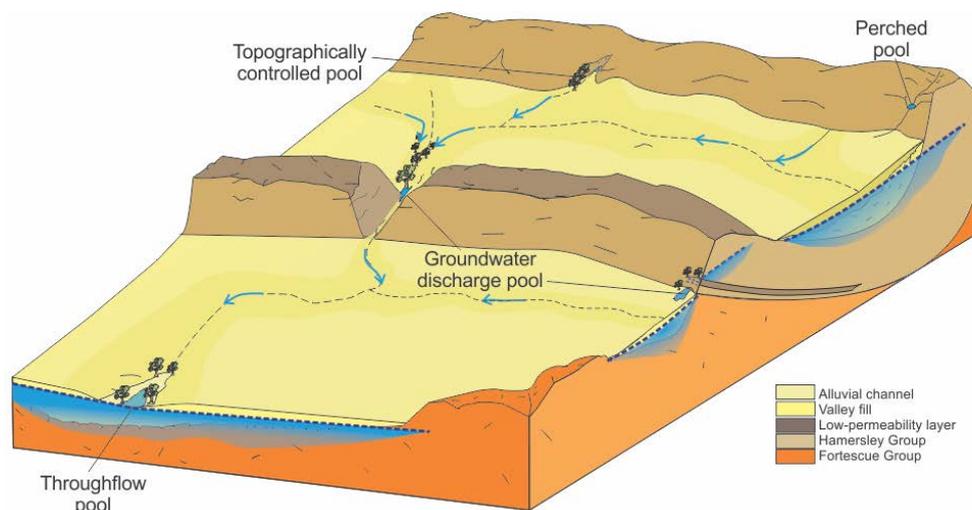

572

573 **Figure 7 Generalized landscape position of each type of persistent pool within the Hamersley Basin**

574

575 5.2 Case Studies

576 The following three case studies demonstrate the application of this framework to three different pools
577 (or pool systems) within the Hamersley Basin. To the best of our knowledge these pools have not been
578 impacted by human activities. These case-studies demonstrate the application of key methods to infer
579 hydraulic mechanisms supporting pool persistence, and the complexity of applying these methods in
580 real-world situations. We start with a simple case, and build complexity with each case study, using
581 data that highlight the temporal and spatial variability in pool hydrochemistry and provide valuable
582 insight into the supporting hydraulic mechanisms (but also limits the appropriateness of basing an
583 assessment on a small number of samples). The implications of these mechanisms for the susceptibility
584 of the pools to groundwater withdrawals or changing climate are also discussed.

585 5.2.1 Case study 1: Plunge Pool

586 Plunge Pool (Fig. 8a) is located at the base of a steep topographic drop-off that exposes the Marra
587 Mamba Formation (fractured banded iron formation, shale and chert) and the Wittenoom Formation
588 (consisting of dolomite and shale) and Marra Mamba Formation are hydraulically connected and form




589 an unconfined regional aquifer where there has been sufficient weathering and fracturing to generate
590 secondary porosity. This aquifer is 50-100 m thick and divided laterally by (sub-)vertical  on the
591 order of 1 km apart (but as close as 100 m) that act as hydraulic barriers within the groundwater system.
592 The surface catchment has an area of approximately 26 km² and is storage limited. Regional
593 groundwater in the adjacent aquifer has a hydraulic head of 547 m AHD  a distance of 200 m from
594 the pool, increasing to 557 m AHD 600 m from the pool, indicating the presence of a geological barrier
595 between these two monitoring well . Seasonal variation in groundwater hydraulic heads is minimal (on
596 the order of 0.2 m).

597 The pool is perennial with seasonal water level fluctuation driven by variation in streamflow,
598 groundwater inflow and evapotranspiration (Fig. 8b). The varying proportions of the pool water balance
599 components are reflected in the temporal variation in the salinity of water in the pool. At the onset of
600 the first wet season flood the salinity in the pool spikes (up to 4171 mS/cm), reflecting the flushing of
601 surficial salts that were deposited during the previous dry through the catchment. Subsequent rainfall
602 events then cause a rapid freshening of the pool (to as low as 124 mS/cm within 1 day). In the absence
603 of rainfall, the salinity of the pool equilibrates to the that of groundwater in the regional aquifer (900
604 mS/cm). Given the consistency of groundwater levels, this inflow rate will be relatively constant, so
605 that (in the absence of streamflow) the variability in the salinity of the pool is driven by seasonal
606 variation in temperature and evapotranspiration (Bureau of Meteorology Station #007185, Paraburdoo
607 Aero). These seasonal weather patterns drive evapo-concentration of solutes in the pool as water levels
608 fall during the dry season and freshening of the pool as water levels rise when evapotranspiration
609 decreases in winter (May-Sep).

610 Based on these data, the dominant hydraulic mechanism supporting the persistence of this pool is 
611 groundwater inflow from the regional aquifer that is intersected by topograph  (Section 2.3.2). In spite
612 of the source being a regional aquifer, the spatial extent of the groundwater reservoir supporting the
613 pool is limited by the presence of geological dykes (Fig. 8c). The pool effectively acts as a “drain” on
614 the underlying/adjacent compartment of the unconfined aquifer with the inflow rate to the pool



615 controlled by the hydraulic conductivity of the aquifer (variation in groundwater levels is negligible).
616 The pool is also hydraulically connected to the alluvial aquifer and water from the pool is likely to
617 infiltrate into the alluvium on the down-gradient side, but this has not been measured directly (alluvium
618 is absent up-gradient of the pool – therefore alluvial through-flow is not a supporting mechanism). The
619 susceptibility of this pool to groundwater withdrawals is controlled by the hydrogeological
620 compartmentalization. The pool will be more susceptible to groundwater withdrawals from the aquifer
621 between the  and the pool, and less susceptible groundwater withdrawals outside of this
622 compartment. Given that evaporation is an important component of the water balance and contributes
623 to the regulation of water levels, this pool is also susceptible to increases in evapotranspiration that are
624 predicted as temperatures increase under climate change (IPCC, 2021).

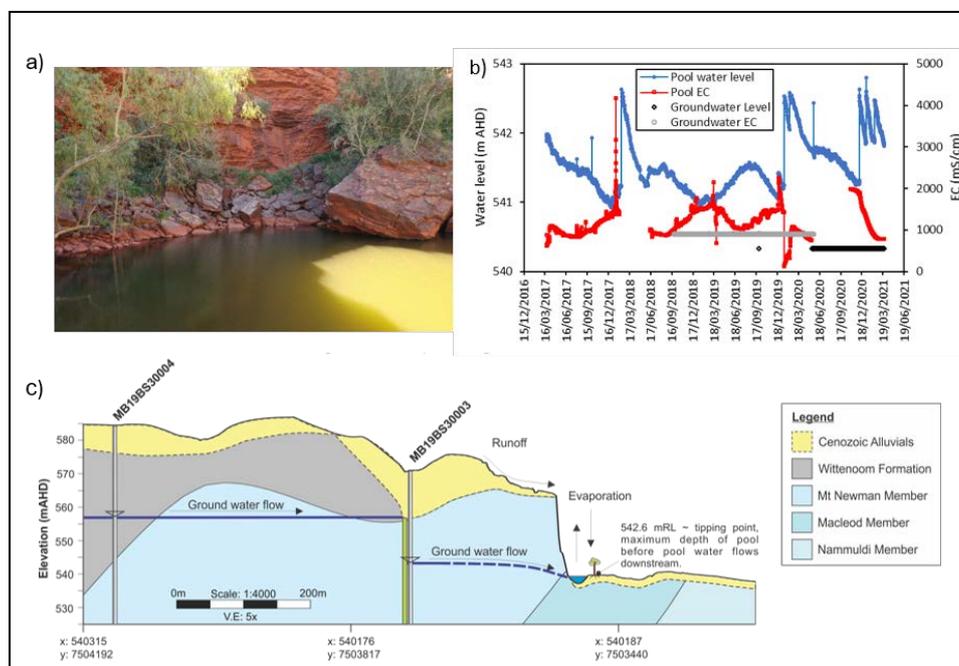

625
626 **Figure 8** a) photo of Plunge Pool, b) pool water level and electrical conductivity (EC), c) hydrogeological setting of the
627 pool 

628



629 **5.2.2 Case Study 2: Howie's Hole**

630 Howie's Hole is a pool within stream channel alluvium at the exit point of a short, narrow gorge
631 (Fig. 9a). Immediately at the outlet of the gorge (approximately 30 m up-hydraulic gradient of the
632 pool) there is also a seep where groundwater outflows to surface for most of the year (seep dries for
633 approximately 2-3 months at end of dry season). The seep is supported by the regional unconfined
634 aquifer hosted within the Marra Mamba Formation (fractured E  hale and chert) and the surficial
635 sediments above it (including the alluvial channel sediments), which are hydraulically connected.
636 At the seep, the Brockman formation has become adjacent to the Marra Mamba due to faulting and
637 this forms a relatively impermeable hydraulic barrier approximately 700 m wide (identified by the
638 abrupt change in water table depth either side of the formation). The surface catchment upstream
639 of Howie's Hole has an area of 33 km². The gorge restricts the stream channel from 30 m width
640 down to a channel width of 10 m, enhancing the flow rate and resulting in scour and erosion of the
641 Brockman formation. This area of scour during high-flow events has subsequently been filled by
642 deposition of unconsolidated alluvial sediments, which are now at the base of the pool (sediments
643 speculated to be 5-10 m deep).

644 The height of the regional water table is only known 1.5 km away from the seep, with seasonal
645 fluctuations of 1-2 m (Fig. 9b). We assume that the water table declines towards the seep consistent
646 with topographic elevation change (~ 20 m drop over 1.5 km), and that the seep reflects the height
647 of the water table at that location (elevation of the groundwater seep is 405 m AHD). During the
648 period of observation, the groundwater seep dried up when the measured water table elevation
649 dropped below ~418.4 m AHD (water sample collected when the measured water table was at 418.5
650 m AHD on 12th Nov 2018); the seep was dry when the measured water table was at 418.3 m AHD
651 on 7th Dec 2018. Pool water levels track groundwater elevations above 418 m AHD, but data from
652 2019 shows the pool depth levelling off as the water table at the monitoring bore drops below 418
653 m AHD, suggesting the cessation of significant groundwater inputs. The pool water levels have not



654 been surveyed to the Australian Height Datum, but pool water level is consistently below the
655 elevation of the seep (approximately 398 - 400 m AHD).


656 Similar to Plunge Pool, the pool salinity spikes with the seasonal onset of rainfall, before freshening
657 once the accumulated salts have flushed through (Fig. 9c). In the absence of rainfall, pool salinity
658 is similar to groundwater at the water table (Marra Mamba EC 1140 uS/cm) until the water table
659 drops below the pool and groundwater inputs (from the seep) cease. Subsequently, evapo-
660 concentration dominates the water balance of Howie's Hole, resulting in salinity increases. This
661 process of disconnection from regional groundwater is also evident in stable isotopic values at the
662 site (Fig. 9d). Isotopic values at the seep are relatively constant and close to values in the pool while
663 the groundwater is connected; after disconnection (Aug 2018) isotopic values increase in response
664 to evapo-concentration.

665 Based on these data we conclude that Howie's Hole reflects the water level in the alluvial aquifer
666 within the stream channel (Fig. 9e). The location of the groundwater seep is determined by the
667 geological contact between the permeable Marra Mamba Formation and impermeable Brockman
668 Iron Formation in the subsurface, which coincides with the catchment constriction (gorge) that
669 forms an outlet for surface and groundwater. As a result of the streamflow regime caused by this
670 catchment constriction, the Brockman Iron Formation has been eroded and subsequently filled with
671 unconsolidated stream channel sediments; water storage within these sediments now support the
672 persistence of this pool.

673 The water level and isotopic data indicate a threshold groundwater level for inflow of groundwater
674 to the pool, such that the pool water balance is primarily dominated by groundwater recharged
675 during the previous wet season. Below this threshold water level for groundwater inflow, the
676 persistence of the pool relies on local water storage within the streambed alluvium (supporting pool
677 depths of up to 0.2 m). The persistence of this pool is therefore susceptible to 1) wet season rainfall
678 that is inadequate to recharge the unconfined aquifer to above the threshold water level, or 2)
679 groundwater withdrawals that reduce seasonal peak groundwater levels to below the threshold level.



680 In the absence of this groundwater inflow, the pool is supported by water stored locally within the
 681 streambed sediments (directly beneath the pool) and would be more susceptible to drying through
 682 evapotranspiration (less inflow but the same amount of water loss through evapotranspiration).

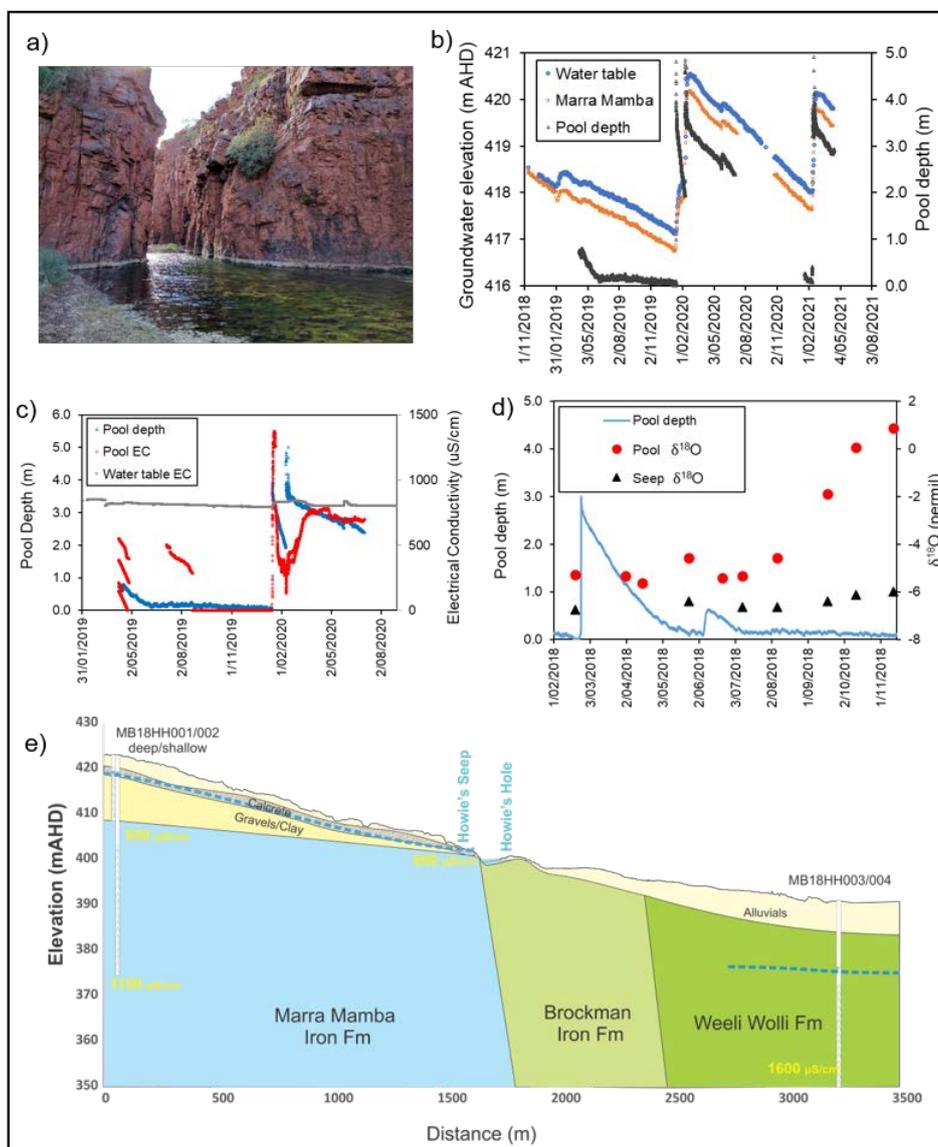

683



684 **Figure 9 a)** photo of Howie's Hole, b) groundwater elevations and pool depth, c) pool water levels and electrical
685 conductivity of pool and groundwater, d) pool depth and $\delta^{18}\text{O}$ showing stable isotopic composition at groundwater seep
686 and evaporative enrichment down-gradient of seep during the dry season, e) conceptual diagram of pool occurrence.

687

688 5.2.3 Case study 3: Ben's Oasis

689 Ben's Oasis is a sequence of three sub-pools that are hydraulically connected during peak water levels
690 and subsequently disconnect during the dry season (Fig. 10a). The pools sit within a major drainage
691 channel that consists of poorly sorted, fine to very coarse (gravel and boulders) unconsolidated alluvial
692 sediments 10's of metres wide and on the order of metres in thickness. The regional water table is within
693 the fractured dolomite of the Wittenoom Formation, which overlies the Marra Mamba Formation. Water
694 levels in the upper pool have been monitored since 2016 and in 2019 a detailed study commenced using
695 environmental tracers to assess the spatial variability of surface water – groundwater interaction along
696 this pool sequence (Chapman, 2019).

697 Measured pool water levels show consistent seasonal trends with water level spikes of 2-3 m in response
698 to cyclonic rainfall events during summer, followed by approximately five months of relatively steady
699 water levels and then recession over approximately three months (Fig. 10b). These trends are consistent
700 with the water level variation in the adjacent alluvium, which exhibits a similar period of steady water
701 levels then recession following the cessation of summer rains. In contrast, regional groundwater levels
702 increase by about 2 m in response to summer rainfall and then immediately begin to recede. Thus,
703 although snapshot water level measurements indicate that pool water levels are consistent with the
704 regional water table, transient water level data (that includes the water level in the alluvium)
705 demonstrates that inflow of water from within the alluvial sediments within the drainage channel is the
706 dominant driver of water level fluctuations in the upper pool (where the logger was installed). Spatial
707 trends in the persistence of surface water and surface geology are also informative at this site. The
708 regional Wittenoom aquifer is exposed at surface around Pools 2 (some alluvium present) and 3 (no
709 alluvium, just bedrock), but not at Pool 1 (no bedrock, just alluvium). The upper, shallower section of



710 Pool 1 and Pool 3 dried out as the dry season progressed, but the deeper parts of Pools 1 and 2 persisted
711 throughout the dry-season (during 2019 and 2020). We interpret these spatial patterns of persistence as
712 reflecting evaporation rates (more or less shading by vegetation) and heterogeneity in groundwater
713 inputs (Chapman, 2019).

714 The results of longitudinal hydrochemical surveys (^{222}Rn and $\delta^{18}\text{O}$) along the pool sequence provide an
715 independent line of evidence to validate this interpretation (Fig. 10c). Alluvial water had a ^{222}Rn activity
716 of 17.6 Bq L^{-1} and $\delta^{18}\text{O}$ of -6.3 ‰ . The regional Wittenoom aquifer had a lower ^{222}Rn activity of 8.1
717 Bq L^{-1} and more depleted $\delta^{18}\text{O}$ of -7.26 ‰ . At the top of Pool 1, ^{222}Rn activity was 7 Bq L^{-1} . Given
718 that degassing of radon to the surface is rapid and the water level at the time of sampling was shallow,
719 the source of water inflows must have a much higher ^{222}Rn activity than 7 Bq L^{-1} and it is therefore
720 most likely that inflows here are dominated by the higher-Rn alluvial water. Isotopic $\delta^{18}\text{O}$ values of
721 around -6 ‰ , are also consistent with inflow of alluvial water. ^{222}Rn activities then decrease along the
722 pool to around 0.5 Bq L^{-1} (indicating degassing, and the absence of further groundwater inputs) as stable
723 isotopic values enrich to just under -5 ‰ (reflecting evaporation and the absence of further groundwater
724 inputs). Water at the top of Pool 2 had ^{222}Rn of 2 Bq L^{-1} (greater than at the bottom of pool 1) and $\delta^{18}\text{O}$
725 of -6.3 ‰ (more depleted than at the bottom of Pool 1). These data indicate further water inflows from
726 the subsurface, along this pool, with a lesser proportion of alluvial water, and more regional
727 groundwater, as well as through-flow from Pool 1 (inferred from relative water levels in the pools). In
728 Pool 3, ^{222}Rn remains around 2 Bq L^{-1} indicating further groundwater inputs, but the stable isotopic
729 values are more enriched (possibly due to the shallow water depth allowing for enhanced evaporation).

730 Streambed temperatures within the pools were also mapped (temperatures measured every $0.2 - 1 \text{ m}$
731 along transects $1-10 \text{ m}$ apart) in early September, when regional groundwater was 29 °C , and alluvial
732 water was 20 °C (Fig. 10d). Measured temperatures were recorded at dawn to reduce the effect of direct
733 solar radiation and pool depth variability (max pool depth was 0.5 m). Streambed temperatures in the
734 pools ranged from $17-23 \text{ °C}$, with the warmest water ($>20 \text{ °C}$) at the top of Pool 1, and temperatures
735 between $19-20 \text{ °C}$ in middle of Pool 2 and at the top of Pool 3. These results are broadly consistent with




736 the other results, but the approach is likely to be more conclusive in the presence of larger temperature
737 gradients. The application of vertical temperature profiles to infer water fluxes at this site was also
738 limited by the substantial lateral component of the subsurface flow-field (i.e. violating the assumption
739 of 1D flow) and flood events that removed or damaged monitoring infrastructure.

740 There are two hydraulic mechanisms supporting the water balance and persistence of these pools;
741 alluvial through-flow and regional groundwater discharge (Fig. 10e). Based on these data we conclude
742 that the persistence of Ben's Oasis throughout the dry season is supported by regional groundwater
743 inflows from the unconfined aquifer where it is exposed at surface (see Section 2.3), but the water
744 balance of Pool 1 is dominated by exchange with the alluvial water (see Section 2.2). This importance
745 of the alluvial water storage in supporting the largest of these pools is only evident based on time-series
746 water level data from the alluvium. Given only snapshot water level measurements from the regional
747 aquifer and one location in the pools, the similarity in water level elevations would lead to the
748 conclusion that regional groundwater discharge was the dominant supporting mechanism. The
749 substantial spatial variability captured in the longitudinal hydrochemical survey also highlights the risks
750 of making conclusions about surface water – groundwater interactions from snapshot hydrochemistry
751 measurements in just one location within a given pool or pool sequence.

752 The persistence of these pools through the dry season is dependent on influx of water from the regional
753 unconfined aquifer. They will therefore be susceptible to groundwater withdrawals from the regional
754 aquifer if they reduce the hydraulic head to below the level of the ground surface at the pools. The water
755 balance of these pools is also controlled by the interaction with water stored in the alluvium (alluvial
756 through-flow). Therefore, the pools are also susceptible to reductions in rainfall or increases in
757 temperature (and evapotranspiration) that reduce the volume of water storage (and therefore water
758 levels) within the streambed alluvium. A reduction in the area of the surface catchment resulting from
759 human activity could also similarly alter the water balance of these pools.

760

761

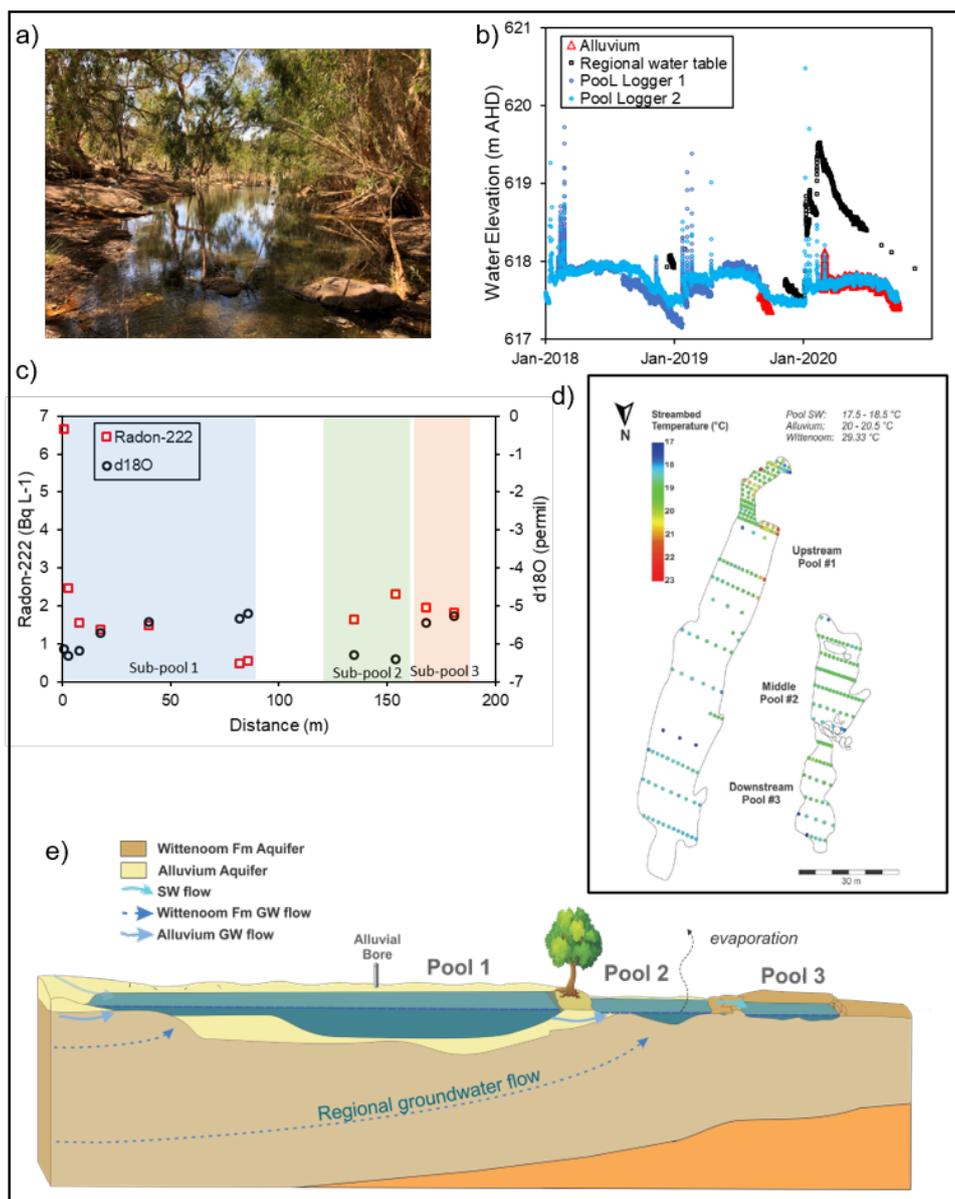

762

763 **Figure 10 a)** photo of Ben's Oasis, **b)** water levels in the Pool 1 (logger 1 elevation was surveyed, logger 2 elevation was

764 approximated by matching data from logger 1), alluvium (DP1) and regional unconfined aquifer, **c)** spatial variation

765 in radon activities and $\delta^{18}\text{O}$ along the pool sequence, **d)** temperature mapping of pool sediments and **e)** conceptual

766 diagram of mechanisms supporting pool persistence.

767



768 **6 Conclusion and recommendations**

769 It has now been 100 years since groundwater springs were documented in published literature (Bryan,
770 1919; Meinzer, 1927; Meinzer, 1923) and while frameworks for groundwater springs and aspects of
771 non-perennial streams (e.g. Costigan et al., 2016) exist, there hasn't yet been a hydraulic classification
772 system defined that applies to persistent in-stream pools. Persistent pools are an important feature along
773 non-perennial rivers and these types of systems are under increasing pressure from altered hydrology
774 associated with shifting climates and anthropogenic activities (Steward et al., 2012). This paper
775 identifies the dominant hydraulic mechanisms that support pool persistence. Each mechanism has
776 varying degrees of connection to groundwater or differing controls on groundwater outflow (geological
777 barrier vs topography). Pools can be supported by multiple hydraulic mechanisms; through-flow pools
778 with some regional groundwater input are likely common, but it can be difficult to definitively identify
779 this regional component of the water balance. Susceptibility to hydrological change depends on the
780 mechanism(s) of pool persistence and the spatial distribution of stressors relative to the pool. While the
781 existing literature hints at the hydrologic and geologic constraints imperative to pool persistence, the
782 framework presented here provides a more scientific characterisation as required to sufficiently
783 understand and protect persistent pools globally. We also present a suite of tools that can be used to test
784 our conceptualism of pool hydrology at a given site, allowing this framework to be applied to the real
785 world.

786 With limited resources and access to sites, trade-offs must be made between detailed characterization
787 of one pool vs a minimal data set at many pools. Snapshot data from multiple pools at one point in time
788 can help distinguish perched pools vs groundwater discharge pools (i.e. pool water hydrochemically
789 similar or different to rainfall or groundwater), but in some cases water types are difficult to distinguish
790 based on easily measured parameters like electrical conductivity or stable isotopes of water (Bourke et
791 al., 2015). Highly instrumented sites with robust geological mapping, monitoring wells and temporal
792 hydrologic data are required to be confident of pool mode of occurrence. Given limited resources, we
793 suggest that time series water level measurements (groundwater and surface water) and hydrochemistry



794 data from fewer pools is more likely to provide useful insights than snapshot data from many pools.
795 This will be particularly effective if detailed empirical data sets at archetypal sites can be used to group
796 pools based on landscape position or geology.

797 The study of persistent river pools is a developing science and much remains to be done. Policy makers
798 increasingly require accurate information on the mode of occurrence of surface water pools to put
799 forward management plans to mitigate and/or minimise the adverse impacts of human activities
800 (Leibowitz et al., 2008). This framework is subject to refinement as sufficient data becomes available
801 to fully characterise pool water balances and mode of occurrence. Extension of this framework to
802 facilitate the incorporation of biological and sedimentological processes is also desirable. Persistent
803 river pools exist in all climates across the globe, and consistent data on geomorphology, hydrology and
804 ecology should be collected at multiple features so that generalized patterns and processes can be
805 elucidated. The nutrient and carbon transport between pools during flows and the effects of
806 anthropogenic disruption to groundwater inputs or surface water flushes into these pools is also not well
807 known. These disruptions can be detrimental to water quality if the anthropogenic inputs are
808 contaminated (Jackson and Pringle, 2010), but may also support seasonal connectivity that benefits the
809 ecosystem by distributing nutrients and organic matter between pools (Jaeger et al., 2014). Effects of
810 climate change (e.g. lower groundwater levels, thermal loading, and altered storm cycles) also combine
811 with geomorphological and biological factors to impact ecosystem function, but these mechanisms are
812 not yet well understood.

813

814 **Data Availability**

815 The data used in Section 5 of this paper are the property of Rio Tinto. Access to these data may be
816 requested by contacting Shawan Dogramaci (shawan.dogramaci@riotinto.com)

817

818 **Author Contribution**



819 SB and MS prepared the text of the manuscript with input from all co-authors. PH, SC, SD and SB
820 collected and analysed the data presented in Section 5. PH and SB prepared the figures.

821

822 **Competing Interests**

823 The authors declare that they have no conflict of interest.

824

825 **Acknowledgements**

826 This paper is based on data collection funded by Rio Tinto Iron Ore and funding from the Australian
827 Research Council, grant LP120100310. Author Shanafield's contribution was supported by funding
828 from the Australian Research Council, grant DE150100302.



829 **References**

- 830 Alaibakhsh, M., Emelyanova, I., Barron, O., Khiadani, M., and Warren, G. Large-scale regional delineation of
831 riparian vegetation in the arid and semi-arid Pilbara region, WA, *Hydrological Processes*, 31, 4269-4281,
832 2017.
- 833 Alfaro, C., and Wallace, M. Origin and classification of springs and historical review with current applications,
834 *Environ Geol*, 24, 112-124, 10.1007/bf00767884, 1994.
- 835 Arthington, A. H., Balcombe, S. R., Wilson, G. A., Thoms, M. C., and Marshall, J. Spatial and temporal variation
836 in fish-assemblage structure in isolated waterholes during the 2001 dry season of an arid-zone floodplain river,
837 Cooper Creek, Australia, *Mar Freshwater Res*, 56, 25-35, <https://doi.org/10.1071/MF04111>, 2005.
- 838 Ashley, G. M., Goman, M., Hover, V. C., Owen, R. B., Renaut, R. W., and Muasya, A. M. Artesian blister
839 wetlands, a perennial water resource in the semi-arid rift valley of East Africa, *Wetlands*, 22, 686-695, 2002.
- 840 Banks, E. W., Shanafield, M. A., Noorduijn, S., McCallum, J., Lewandowski, J., and Batelaan, O. Active heat
841 pulse sensing of 3-D-flow fields in streambeds, *Hydrol. Earth Syst. Sci.*, 22, 1917-1929, 10.5194/hess-22-
842 1917-2018, 2018.
- 843 Befus, K. M., Cardenas, M. B., Ong, J. B., and Zlotnik, V. A. Classification and delineation of groundwater–lake
844 interactions in the Nebraska Sand Hills (USA) using electrical resistivity patterns, *Hydrogeology Journal*, 20,
845 1483-1495, 10.1007/s10040-012-0891-x, 2012.
- 846 Bense, V. F., Gleeson, T., Loveless, S. E., Bour, O., and Scibek, J. Fault zone hydrogeology, *Earth-Science*
847 *Reviews*, 127, 171-192, <https://doi.org/10.1016/j.earscirev.2013.09.008>, 2013.
- 848 Bestland, E., George, A., Green, G., Olifent, V., Mackay, D., Whalen, M. Groundwater dependent pools in
849 seasonal and permanent streams in the Clare Valley of South Australia. *J. Hydrol. Regional Studies*, 9, 216-
850 235. 2017.
- 851 Bishop-Taylor, R., Tulbure, M.G., Broich, M. Surface-water dynamics and land use influence landscape
852 connectivity across a major dryland region. *Ecological Applications*, 27(4), 1124-1137, 2017,
853 <https://doi.org/10.1002/eap.1507>.



- 854 Blackburn, J., Comte, J., Foster, G., Gibbins, C. Hydrogeological controls on the flow regime of an ephemeral
855 temperate stream flowing across an alluvial fan. *Journal of Hydrology*, 595, 125994, 2021,
856 <https://doi.org/10.1016/j.jhydrol.2021.125994>.
- 857 Bogan, M. T., and Lytle, D. A. Severe drought drives novel community trajectories in desert stream pools,
858 *Freshwater Biology*, 56, 2070-2081, 10.1111/j.1365-2427.2011.02638.x, 2011.
- 859 Bonada, N., Cañedo-Argüelles, M., Gallart, F., von Schiller, D., Fortuño, P., Latron, J., Llorens, P., Murria, C.,
860 Soria, M., Vinyoles, D., Cid, N. Conservation and management of isolated pools in temporary rivers, *Water*,
861 12 (10) 2870, <https://doi.org/10.3390/w12102870>, 2020.
- 862 Boulton, A.J. Parallels and contrasts in the effects of drought on stream macroinvertebrate assemblages.
863 *Freshwater Biology*, 48, 1173-1185. <https://doi.org/10.1046/j.1365-2427.2003.01084.x>, 2003
- 864 Bourke, S. A., Harrington, G. A., Cook, P. G., Post, V. E., and Dogramaci, S. Carbon-14 in streams as a tracer of
865 discharging groundwater, *Journal of Hydrology*, 519, 117-130,
866 <http://dx.doi.org/10.1016/j.jhydrol.2014.06.056>, 2014.
- 867 Bourke, S. A., Cook, P. G., Dogramaci, S., and Kipfer, R. Partitioning sources of recharge in environments with
868 groundwater recirculation using carbon-14 and CFC-12, *Journal of Hydrology*, 525, 418-428, 2015.
- 869 Bourke, S.A., Degens, B., Searle, J., de Castro Tayer, T., Rother, J. Geological permeability controls streamflow generation
870 in a remote, ungauged, semi-arid drainage system. *J. Hydrol. Regional Studies*, *In Review*
- 871 Briggs, M. A., Hare, D. K., Boutt, D. F., Davenport, G., and Lane, J. W. Thermal infrared video details multiscale
872 groundwater discharge to surface water through macropores and peat pipes, *Hydrological Processes*, 30, 2510-
873 2511, 10.1002/hyp.10722, 2016.
- 874 Brunner, P., Cook, P., and Simmons, C. Hydrogeologic controls on disconnection between surface water and
875 groundwater, *Water Resources Research*, 45, W01422, 2009.
- 876 Bryan, K.: Classification of springs, *The Journal of Geology*, 27, 522-561, 1919.
- 877 Bunn, S. E., Thoms, M. C., Hamilton, S. K., and Capon, S. J. Flow variability in dryland rivers: boom, bust and
878 the bits in between, *River Research and Applications*, 22, 179-186, 10.1002/rra.904, 2006.
- 879 Caldwell, T.G., Wolaver, B.D., Bongiovanni, T., Pierre, J.P., Robertson, S., Abolt, C., Scanlon, B.R. Spring
880 discharge and thermal regime of a groundwater dependent ecosystem in an arid karst environment, *J. Hydrol.*,
881 587, 124947, 2020.



- 882 Cardenas, M. B., Neale, C. M. U., Jaworowski, C., and Heasler, H. High-resolution mapping of river-
883 hydrothermal water mixing: Yellowstone National Park, *International Journal of Remote Sensing*, 32, 2765-
884 2777, 10.1080/01431161003743215, 2011.
- 885 Cardenas, M.B., Wilson, J.L. Exchange across a sediment–water interface with ambient groundwater discharge.
886 *Journal of hydrology*, 346(3-4), 69-80, 2007, <https://doi.org/10.1016/j.jhydrol.2007.08.019>.
- 887 Chapman, S. Groundwater discharge to persistent in-stream pools in dryland regions. Master Thesis, School of
888 Earth Sciences, University of Western Australia, 2019.
- 889 Conant, B.: Delineating and quantifying ground water discharge zones using streambed temperatures, *Ground*
890 *Water*, 42, 243-257, 2004.
- 891 Cook, P. G., Wood, C., White, T., Simmons, C. T., Fass, T., and Brunner, P. Groundwater inflow to a shallow,
892 poorly-mixed wetland estimated from a mass balance of radon, *Journal of Hydrology*, 354, 213-226,
893 <http://dx.doi.org/10.1016/j.jhydrol.2008.03.016>, 2008.
- 894 Cook, P. G. Estimating groundwater discharge to rivers from river chemistry surveys, *Hydrological Processes*,
895 27, 3694-3707, 10.1002/hyp.9493, 2013.
- 896 Cook, P. G., and Dogramaci, S. Estimating Recharge From Recirculated Groundwater With Dissolved Gases: An
897 End-Member Mixing Analysis, *Water Resources Research*, 55, 5468-5486, 10.1029/2019wr025012, 2019.
- 898 Costigan, K.H., Daniels, M.D., Dodds, W.K. Fundamental spatial and temporal disconnections in the hydrology
899 of an intermittent prairie headwater network. *J. Hydrol.* 522, 305–316.
900 <https://doi.org/10.1016/j.jhydrol.2014.12.031>, 2015.
- 901 Costigan, K. H., Jaeger, K. L., Goss, C. W., Fritz, K. M., & Goebel, P. C. Understanding controls on flow
902 permanence in intermittent rivers to aid ecological research: integrating meteorology, geology and land cover.
903 *Ecohydrology*, 9(7), 1141–1153. <https://doi.org/10.1002/eco.1712>, 2016.
- 904 Cranswick, R.H., Cook, P.G., Scales and magnitude of hyporheic, river-aquifer and bank storage exchange fluxes,
905 *Hydrological Processes*, 29(14) 3084-3097, 2015.
- 906 Cushing, C. E., and Wolf, E. G.: Primary production in Rattlesnake Springs, a cold desert spring-stream,
907 *Hydrobiologia*, 114, 229-236, 10.1007/bf00031874, 1984.



- 908 Cuthbert, M.O., Gleeson, T., Reynolds, S.C., Bennett, M.R., Newton, A.C., McCormack, C.J., Ashley, G.M.
909 Modelling the role of groundwater hydro-refugia in East African hominin evolution and dispersal, *Nature*
910 *Communications*, 8(1), 1-11, 2017.
- 911 Cuthbert, M.O., Gleeson, T., Moosdorf, N., Befus, K.M., Schneider, A., Hartmann, J., Lehner, B. Global patterns
912 and dynamics of climate-groundwater interactions, *Nature Climate Change*, 9, 137-141, 2019.
- 913 Davis, L., Thoms, M. C., Fellows, C., and Bunn, S.: Physical and ecological associations in dryland refugia:
914 waterholes of the Cooper Creek, Australia, *International Association of Hydrological Sciences, Publication*,
915 276, 77-84, 2002.
- 916 Deemy, J. B., and Rasmussen, T. C. Hydrology and water quality of isolated wetlands: Stormflow changes along
917 two episodic flowpaths, *Journal of Hydrology: Regional Studies*, 14, 23-36,
918 <https://doi.org/10.1016/j.ejrh.2017.10.001>, 2017.
- 919 Doble, R., Brunner, P., McCallum, J., Cook, P.G. An analysis of river bank slope and unsaturated flow effects on
920 bank storage, *Groundwater*, 50, 77-86, <https://doi.org/10.1111/j.1745-6584.2011.00821.x>, 2012
- 921 Dogramaci, S., Skrzypek, G., Dodson, W., Grierson, P.F. Stable isotope and hydrochemical evolution of
922 groundwater in the semi-arid Hamersley Basin of subtropical northwest Australia, *J. Hydro.*, 475, 281-293,
923 2012.
- 924 Dogramaci S. Springs, pools and seeps in the Hamersley Basin, NW Australia, internal report for Rio Tinto Iron
925 Ore, 2016.
- 926 Fellman, J. B., Dogramaci, S., Skrzypek, G., Dodson, W., and Grierson, P. F. Hydrologic control of dissolved
927 organic matter biogeochemistry in pools of a subtropical dryland river, *Water Resour. Res.*, 47, W06501,
928 10.1029/2010wr010275, 2011.
- 929 Fetter, C.W. *Applied hydrogeology (Fourth Edition)*. Prentice Hall, Upper Saddle River, USA, 2001.
- 930 Finn, M., and Jackson, S. Protecting Indigenous Values in Water Management: A Challenge to Conventional
931 Environmental Flow Assessments, *Ecosystems*, 14, 1232-1248, 10.1007/s10021-011-9476-0, 2011.
- 932 Fitts, C. R. *Groundwater science*. Elsevier, 2002.



- 933 Gardener, W.P., Harrington, G.A., Solomon, D.K., Cook, P.G. Using terrigenic 4He to identify and quantify
934 regional groundwater discharge to streams, *Water Resources Research*, 47, W06523,
935 doi:10.1029/2010WR010276, 2011.
- 936 Gibson, J.J. Short-term evaporation and water budget comparisons in shallow Arctic lakes using non-steady
937 isotope mass balance. *Journal of Hydrology*, 264(1-4), 242-261, 2002.
- 938 Godsey, S. E., and Kirchner, J. W. Dynamic, discontinuous stream networks: hydrologically driven variations in
939 active drainage density, flowing channels and stream order, *Hydrological Processes*, 28, 5791-5803,
940 10.1002/hyp.10310, 2014.
- 941 Goodrich, D. C., Kepner, W. G., Levick, L. R., and Wigington Jr., P. J. Southwestern Intermittent and Ephemeral
942 Stream Connectivity, *JAWRA Journal of the American Water Resources Association*, 54, 400-422,
943 10.1111/1752-1688.12636, 2018.
- 944 Gutiérrez-Jurado, K.Y., Partington, D., Batelaan, O., Cook, P., Shanafield, M. What Triggers Streamflow for
945 Intermittent Rivers and Ephemeral Streams in Low-Gradient Catchments in Mediterranean Climates. *Water*
946 *Resour. Res.* 55, 9926–9946. <https://doi.org/10.1029/2019WR025041>, 2019.
- 947 Haas, E. M., Bartholomé, E., and Combal, B. Time series analysis of optical remote sensing data for the mapping
948 of temporary surface water bodies in sub-Saharan western Africa, *Journal of Hydrology*, 370, 52-63,
949 <https://doi.org/10.1016/j.jhydrol.2009.02.052>, 2009.
- 950 Hamilton, S. K., Bunn, S. E., Thoms, M. C., and Marshall, J. C. Persistence of aquatic refugia between flow pulses
951 in a dryland river system (Cooper Creek, Australia), *Limnology and Oceanography*, 50, 743-754, 2005.
- 952 Harrington, G. A., Payton Gardner, W., and Munday, T. J. Tracking Groundwater Discharge to a Large River
953 using Tracers and Geophysics, *Groundwater*, 2013.
- 954 Herczeg, A.L. and Leaney, F.W. Environmental tracers in arid-zone hydrology. *Hydrogeology Journal*, 19(1), 17-
955 29, 2011, <https://doi.org/10.1007/s10040-010-0652-7>.
- 956 Huang, J., Chunyu, X., Zhang, D., Chen, X., Ochoa, C.G. A framework to assess the impact of ecological water
957 conveyance on groundwater-dependent terrestrial ecosystems in arid inland river basins, *Sci. Tot. Env.*, 709,
958 136155, 2020.



- 959 IPCC, 2021 Climate Change 2021: The Physical Science Basis. Contribution of Working Group I to the Sixth
960 Assessment Report of the Intergovernmental Panel on Climate Change [Masson-Delmotte, V., P. Zhai, A.
961 Pirani, S. L. Connors, C. Péan, S. Berger, N. Caud, Y. Chen, L. Goldfarb, M. I. Gomis, M. Huang, K. Leitzell,
962 E. Lonnoy, J. B. R. Matthews, T. K. Maycock, T. Waterfield, O. Yelekçi, R. Yu and B. Zhou (eds.)].
963 Cambridge University Press. In Press.
- 964 Jackson, C.R., Pringle, C.M. Ecological benefits of reduced hydrologic connectivity in intensively developed
965 landscapes. *BioScience*, 60(1), 37-46, 2010, <https://doi.org/10.1525/bio.2010.60.1.8>.
- 966 Jaeger, K., Olden, J. Electrical resistance sensor arrays as a means to quantify longitudinal connectivity of rivers,
967 *River Research and Applications*, 2011.
- 968 Jaeger, K. L., Olden, J. D., and Pelland, N. A. Climate change poised to threaten hydrologic connectivity and
969 endemic fishes in dryland streams, *Proceedings of the National Academy of Sciences*, 111, 13894-13899,
970 2014.
- 971 John, K. R. Survival of Fish in Intermittent Streams of the Chiricahua Mountains, Arizona., *Ecology*, 45,
972 <https://doi.org/10.2307/1937112>, 1964.
- 973 Käser, D.H., Binley, A., Heathwaite, A.L., Krause, S. Spatio-temporal variations of hyporheic flow in a riffle-
974 step-pool sequence. *Hydrological Processes: An International Journal*, 23(15), 2138-2149, 2009,
975 <https://doi.org/10.1002/hyp.7317>.
- 976 Kelso, J. E., and Entekin, S. A. Intermittent and perennial macroinvertebrate communities had similar richness
977 but differed in species trait composition depending on flow duration, *Hydrobiologia*, 807, 189-206, 2018.
- 978 Knighton, A. D., and Nanson, G. C. Waterhole form and process in the anastomosing channel system of Cooper
979 Creek, Australia, *Geomorphology*, 35, 101-117, 2000.
- 980 Kresic, N., and Stevanovic, Z. *Groundwater Hydrology of Springs*, Elsevier, 592 pp., 2010.
- 981 Labbe, T. R., and Fausch, K. D. Dynamics of intermittent stream habitat regulate persistence of a threatened fish
982 at multiple scales *Ecological Applications*, 10, 1774-1791, doi: 10.1890/1051-
983 0761(2000)010[1774:doishr]2.0.co;2, 2000.
- 984 Lamontagne, S, Kirby, J, Johnston, C. Groundwater–surface water connectivity in a chain-of-ponds semiarid
985 river. *Hydrological Processes*. 35:e14129. <https://doi.org/10.1002/hyp.14129>, 2021.



- 986 Lautz, L. K. Impacts of nonideal field conditions on vertical water velocity estimates from streambed temperature
987 time series, *Water Resour. Res.*, 46, W01509, 10.1029/2009wr007917, 2010.
- 988 Leibowitz, S. G., Wigington Jr, P. J., Rains, M. C., and Downing, D. M. Non-navigable streams and adjacent
989 wetlands: addressing science needs following the Supreme Court's Rapanos decision, *Frontiers in Ecology and*
990 *the Environment*, 6, 364-371, 2008.
- 991 McCallum, J.L., Shanafield, M. Residence times of stream-groundwater exchanges due to transient stream stage
992 fluctuations, *Water Resour. Res.*, 52, 2059– 2073, doi:[10.1002/2015WR017441](https://doi.org/10.1002/2015WR017441).
- 993 McJannet, D., Hawdon, A., Van Neil, T., Boadle, D., Baker, B., Trefry, M., Rea, I.: Measurement of evaporation
994 from a mine void lake and testing of modelling approaches, *J. Hydrol.* 555, 631-647, 2017.
- 995 McMahon, T.A., Finlayson, B.L., Peel, M.C. Historical development of models for estimating evaporation using
996 standard meteorological data, *Wires Water*, 3(6) 788-818, 2016.
- 997 Manga, M. On the timescales characterizing groundwater discharge at springs, *Journal of Hydrology(Amsterdam)*,
998 219, 56-69, 1999.
- 999 Marshall, S.K., Cook, P.G., Miller, A.D., Simmons, C.T., Dogramaci, S. The effect of undetected barriers on
1000 groundwater draw-down and recovery, *Groundwater*, 57(5), 718-726, 10.1111/gwat.12856, 2019.
- 1001 Mather, C. C., Nash, D. J., Dogramaci, S., Grierson, P. F., and Skrzypek, G. Geomorphic and hydrological controls
1002 on groundwater dolomite formation in the semi-arid Hamersley Basin, northwest Australia, *Earth Surface*
1003 *Processes and Landforms*, 44, 2752-2770, 10.1002/esp.4704, 2019.
- 1004 Melly, B.L., Schael, D.M., Gama, P.T. Perched wetlands: An explanation to wetland formation in semi-arid areas,
1005 *Journal of Arid Environments*, 141, 34-39, <https://doi.org/10.1016/j.jaridenv.2017.02.004>, 2017.
- 1006 Meinzer, O. Outline of ground-water hydrology with definitions, *US Geol Surv Water Suppl Pap*, 494, 1923.
- 1007 Meinzer, O. E. Large springs in the United States, Washington, D.C., Report 557, 119, 1927.
- 1008 Messenger, M.L., Lehner, B., Cockburn, C., Lamouroux, N., Pella, H., Snelder, T., Tocknew, K., Trautmann, T.,
1009 Watt, C., Datry, T. Global prevalence of non-perennial rivers and streams, *Nature* 594, 391-397, 2021.
- 1010 Ong, J. B., Lane, J. W., Zlotnik, V. A., Halihan, T., and White, E. A. Combined use of frequency-domain
1011 electromagnetic and electrical resistivity surveys to delineate near-lake groundwater flow in the semi-arid
1012 Nebraska Sand Hills, USA, *Hydrogeology Journal*, 18, 1539-1545, 10.1007/s10040-010-0617-x, 2010.



- 1013 Pearson, M.R., Reid, M.A., Miller, C., Ryder, D. Comparison of historical and modern river surveys reveal
1014 changes to waterhole characteristics in an Australian dryland river. *Geomorphology*, 356, 107089,
1015 <https://doi.org/10.1016/j.geomorph.2020.107089>, 2020.
- 1016 Pidwirny, M. Throughflow and Groundwater Storage, in *Fundamentals of Physical Geography*, 2nd Edition. 2006.
- 1017 Poeter, E., Fan, Y., Cherry, J., Wood, W., Mackay, D. Groundwater in our water cycle – getting to know Earth’s
1018 most important fresh water source, 136pp. Groundwater Project, Geulph, Ontario, Canada. 2020
- 1019 Ponder, W. F. Mound Springs of the Great Artesian Basin, in: *Limnology in Australia*, edited by: De Deckker, P.,
1020 and Williams, W. D., Springer Netherlands, Dordrecht, 403-420, 1986.
- 1021 Queensland Government, Queensland. Catchment constrictions, *WetlandInfo* website, accessed 16 June 2021.
1022 Available at: [https://wetlandinfo.des.qld.gov.au/wetlands/ecology/aquatic-ecosystems-natural/groundwater-](https://wetlandinfo.des.qld.gov.au/wetlands/ecology/aquatic-ecosystems-natural/groundwater-dependent/catchment-constrictions/)
1023 [dependent/catchment-constrictions/](https://wetlandinfo.des.qld.gov.au/wetlands/ecology/aquatic-ecosystems-natural/groundwater-dependent/catchment-constrictions/), 2015.
- 1024 Rau, G. C., Andersen, M. S., McCallum, A. M., and Acworth, R. I. Analytical methods that use natural heat as a
1025 tracer to quantify surface water–groundwater exchange, evaluated using field temperature records,
1026 *Hydrogeology Journal*, 18, 1093-1110, [10.1007/s10040-010-0586-0](https://doi.org/10.1007/s10040-010-0586-0), 2010.
- 1027 Rau,G.C., Halloran, L.J.S., Cuthbert, M.O., Andersen, M.S., Acworth, R.I., Tellam, J.H. Characterising the
1028 dynamics of surface water-groundwater interactions in intermittent and ephemeral streams using streambed
1029 thermal signatures, *Advances in Water Resources*, 107, 354-369,
1030 <https://doi.org/10.1016/j.advwatres.2017.07.005>, 2017.
- 1031 Rayner, T. S., Jenkins, K. M., and Kingsford, R. T. Small environmental flows, drought and the role of refugia
1032 for freshwater fish in the Macquarie Marshes, arid Australia, *Ecohydrology: Ecosystems, Land and Water*
1033 *Process Interactions, Ecohydrogeomorphology*, 2, 440-453, 2009.
- 1034 Rhodes, K. A., Proffitt, T., Rowley, T., Knappett, P. S. K., Montiel, D., Dimova, N., ... Miller, G. R. The
1035 importance of bank storage in supplying baseflow to rivers flowing through compartmentalized, alluvial
1036 aquifers. *Water Resources Research*, 53, 10,539– 10,557. <https://doi.org/10.1002/2017WR021619>, 2017.
- 1037 Roshier, D.A., Whetton, P.H., Allan, R.J., Robertson, A.I. Distribution and persistence of temporary wetland
1038 habitats in arid Australia in relation to climate change, *Austral Ecology*, 26(4) 371-384, 2001.



- 1039 Scanlon, B.R., Keese, K.E., Flint, A.L., Flint, L.E., Gaye, C.B., Edmunds, M., Simmers, I. Global synthesis of
1040 groundwater recharge in semiarid and arid regions, *Hydrol. Process.*, 20, 3335-3370, 2006.
- 1041 Shanafield, M., Bourke, S.A., Zimmer, M.A. Costigan, K.H. An overview of the hydrology of non-perennial rivers
1042 and streams. *Wiley Interdisciplinary Reviews: Water*, 8(2), e1504, 2021.
- 1043 Shanafield, M. and Cook, P.G. Transmission losses, infiltration and groundwater recharge through ephemeral and
1044 intermittent streambeds: A review of applied methods. *Journal of Hydrology*, 511, 518-529, 2014,
1045 <https://doi.org/10.1016/j.jhydrol.2014.01.068>.
- 1046 Shannon, J., Richardson, R., Thornes, J. Modelling event-based fluxes in ephemeral streams. In: L. J. Bull, M. J.
1047 Kirkby (Eds.). *Dryland Rivers: Hydrology and Geomorphology of Semi-Arid Channels*, 129-172, John Wiley
1048 and Sons, Chichester, England. 2002. Sharma, D., Kansal, A. Assessment of river quality models: a review.
1049 *Reviews in Environmental Science and Bio/Technology*, 12(3), 285-311, 2013, [https://doi.org/10.1007/s11157-](https://doi.org/10.1007/s11157-012-9285-8)
1050 [012-9285-8](https://doi.org/10.1007/s11157-012-9285-8).
- 1051 Sheldon, F., Bunn, S. E., Hughes, J. M., Arthington, A. H., Balcombe, S. R. and Fellows, C. S. Ecological roles
1052 and threats to aquatic refugia in arid landscapes: Dryland river waterholes, *Mar. Freshw. Res.*, 61(8), 885–
1053 895, doi:10.1071/MF09239, 2010.
- 1054 Shepard, W. D. Desert springs-both rare and endangered, *Aquatic Conservation: Marine and Freshwater*
1055 *Ecosystems*, 3, 351-359, 1993.
- 1056 Siebers, A. R., Pettit, N. E., Skrzypek, G., Fellman, J. B., Dogramaci, S., and Grierson, P. F. Alluvial ground
1057 water influences dissolved organic matter biogeochemistry of pools within intermittent dryland streams,
1058 *Freshwater Biology*, 61, 1228-1241, 10.1111/fwb.12656, 2016.
- 1059 Siegel, D. Reductionist hydrogeology: ten fundamental principles, *Hydrol. Processes*, 22, 4967-4970, 2008.
- 1060 Soti, V., Tran, A., Bailly, J.-S., Puech, C., Seen, D. L., and Bégué, A. Assessing optical earth observation systems
1061 for mapping and monitoring temporary ponds in arid areas, *International Journal of Applied Earth Observation*
1062 *and Geoinformation*, 11, 344-351, <https://doi.org/10.1016/j.jag.2009.05.005>, 2009.
- 1063 Springer, A. E., and Stevens, L. E. Spheres of discharge of springs, *Hydrogeology Journal*, 17, 83, 2009.
- 1064 Stallman, R. Steady one-dimensional fluid flow in a semi-infinite porous medium with sinusoidal surface
1065 temperature, *Journal of Geophysical Research*, 70, 2821-2827, 1965.



- 1066 Stanley, E. H., Fisher, S. G., and Grimm, N. B. Ecosystem Expansion and Contraction in Streams, *BioScience*,
1067 47, 427-435, 10.2307/1313058, 1997.
- 1068 Steward, A. L., von Schiller, D., Tockner, K., Marshall, J. C., Bunn, S. E. When the river runs dry: human and
1069 ecological values of dry riverbeds., *Front. Ecol. Environ.*, 10, 202–209, 2012.
- 1070 Stonedahl, S.H., Harvey, J.W., Worman, A., Salehin, M., Packman, A.I. A multiscale model for integrating
1071 hyporheic exchange from ripples to meanders, *Water Resour. Res.*, 46, W12539, 10.1029/2009wr008865,
1072 2010.
- 1073 Sturman, A. P., and Tapper, N. J. The weather and climate of Australia and New Zealand, Oxford University
1074 Press, USA, 1996.
- 1075 Theis, C. V. The source of water derived from wells, *Civil Engineering*, 10, 277-280, 1940.
- 1076 Thoms, M. C., and Sheldon, F. Lowland rivers: an Australian introduction, *Regulated Rivers: Research &*
1077 *Management: An International Journal Devoted to River Research and Management*, 16, 375-383, 2000.
- 1078 Townley, L. R., and Trefry, M. G. Surface water-groundwater interaction near shallow circular lakes: Flow
1079 geometry in three dimensions, *Water Resources Research*, 36, 935-948, 10.1029/1999wr900304, 2000.
- 1080 Van der Kamp, G. and Hayashi, M. Groundwater-wetland ecosystem interaction in the semiarid glaciated plains
1081 of North America. *Hydrogeology Journal*, 17(1), 203-214, 2009.
- 1082 Villeneuve, S., Cook, P.G., Shanafield, M., Wood, C. White, N. Groundwater recharge via infiltration through an
1083 ephemeral riverbed, central Australia. *Journal of Arid Environments*, 117, 47-58, 2015.
- 1084 Williams, W.D. and Siebert, B.D. The chemical composition of some surface waters in central Australia. *Marine*
1085 *and Freshwater Research*, 14(2), 166-175, 1963, <https://doi.org/10.1071/MF9630166>. Winter, T.C., Harvey,
1086 J.W., Franke, O.L., Alley, W.M. Groundwater and surface water: a single resource. USGS Circular 1139,
1087 1998.
- 1088 Yu, S. Ngapa Kunangkul: living water, Report on the Indigenous cultural values of groundwater in the La Grange
1089 sub-basin. Perth, Western Australian Water and Rivers Commission, 2000.
- 1090 Zlotnik, V.A., Olaguera, F., Ong, J.B. An approach to assessment of flow regimes of groundwater-dominated
1091 lakes in arid environments, *J. Hydrol.* 371(1-4), 22-30, 2009.